


TrackBusway : GALVANIZED
Fixture : silver



LW LED WALLWASH
'UNIBODY' with Louver Blades
LI Lumen Package

LED WALLWASH


TYPE	Fixture				LED Board				Ballasts		Louver Color	Mnt Kit Color	Option Codes	Finishes	Catalog Number
	Busway	Type	Length	Delivered Lumens	Type	No.	Lumens	Watts	No.	Voltage	(LC)	(MK)	(OC)	(F)	
LED LWseries LOUVER WALLWASH Adjustable	BR	LED	4'	2460	LED	1	2460	21	1	Universal 120/277	WT= White BL=Black GR=Grey	WT= White BL=Black GV=Galv	LI = 4000K/80CRI	WT = White BL = Black SV = Silver	BR-LED-2K-U-GR-GV-LI-(F)

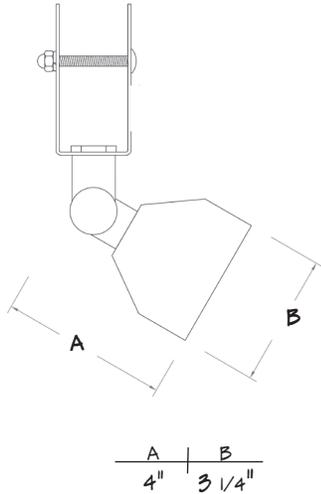

Series Number	Lamps Qty	Lamps Type	Nominal Length
LW	1	LED	4'

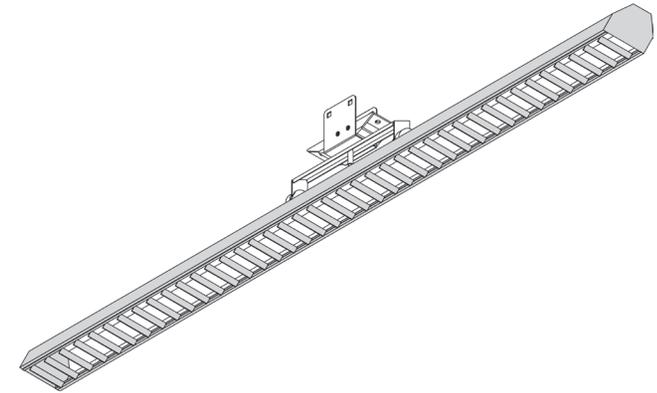

CANDLEPOWER:

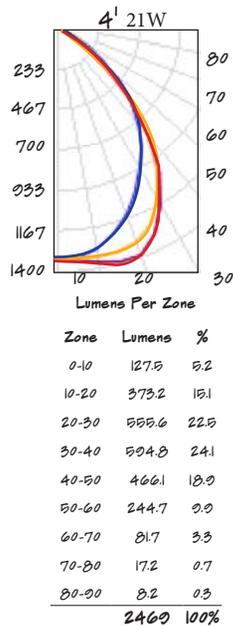

Type:

- Extruded power coated aluminum LED fixture incorporating an LED. Integral electronic driver provides efficient and quiet power.

-5/8" louver provides optimum performance and cut off of increased aesthetics and light control.

Features:

- Heavy duty extruded aluminum body with end caps
- Low profile, aesthetic design
- Integral 5/8" Louver
- High-strength stainless steel electric contacts

Finish:

-Powder coated finish

Colors:

- Three standard colors
 - WT - Sky white (DuPont® PFW665S9)
 - BL - Matte black (DuPont® UFB634S2)
 - SV - Camaro silver (DuPont® UFA402M9)


Reflector:

-0.020 aluminum polished to mirror quality clear specularity.

Driver:



- 120V/277V 50/60 Hz input
- Class 2 power supply
- Over voltage, over current and short protection:Auto recovery
- MTBF > 100,000
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended.

TYPE	Fixture				LED Board			Driver		Louver Color	Mnt Kit Color	Option Codes	Finishes	Catalog Number	
	Busway	Type	Length	Delivered Lumens	Watts	Type	No.	Lumens	No.	Voltage	(LC)	(MK)	(OC)	(F)	
LED LWseries LOUVER WALLWASH Adjustable	BR	FL	4'	4200	44	LED	2	4400	1	Universal 120/277	WT= White GR=Grey	WT= White BL=Black GV=Galv	L2 = 2700K/90 CRI L3 = 3000K/80 CRI L4 = 3500K/80 CRI	WT = White BL = Black SV = Silver	BR-LED4-4K-U-WT-GV-L3-WT

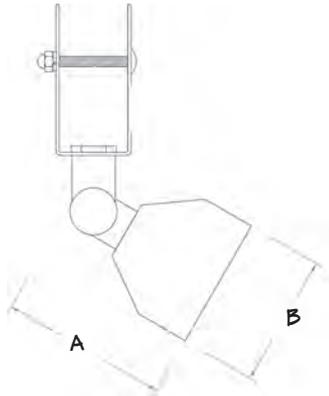


A 4"
B 3 1/4"

Series Number	Boards Qty	Type	Nominal Length
LW	2	LED	4'

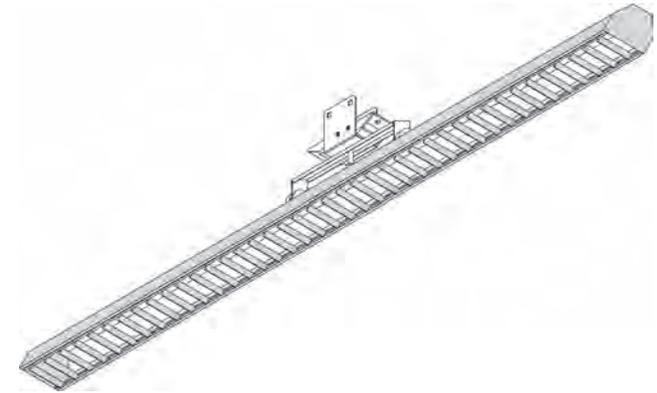

CANDLEPOWER:

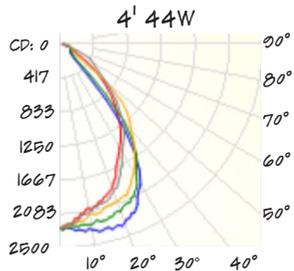

Lumens Per Zone

Zone	Lumens	%
0-10	209.8	5.0
10-20	603.3	14.4
20-30	908.4	21.7
30-40	973.5	23.2
40-50	606.2	16.6
50-60	352.6	8.4
60-70	224.0	5.3
70-80	141.7	3.4
80-90	83.7	2.0
Total	4193	100%

Type:

- Extruded power coated aluminum LED track fixture incorporating a LED. Integral electronic driver provides efficient and quiet power.
- 5/8" louver provides optimum performance and cut off of increased aesthetics and light control.

Features:

- Heavy duty extruded aluminum body with end caps
- Low profile, aesthetic design
- Integral 5/8" Louver
- High-strength stainless steel electrical contacts

Finish:

- Powder coated finish

Colors:

- Three standard colors
 - WT - Sky white (DuPont® PFW665S9)
 - BL - Matte black (DuPont® UFB634S2)
 - SV - Camaro silver (DuPont® UFA402M9)

Reflector:

- 0.020 aluminum polished to mirror quality clear specularity.

Driver:

- 120V/277V 50/60 Hz input
- Class 2 power supply
- Over voltage, over current and short protection: Auto recovery
- MTBF > 100,000
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended.