

SINGLE-DECK



LENGTHs : GALVANIZED



DOUBLE-DECK



LENGTH



LENGTHs : GALVANIZED

SINGLE-DECK

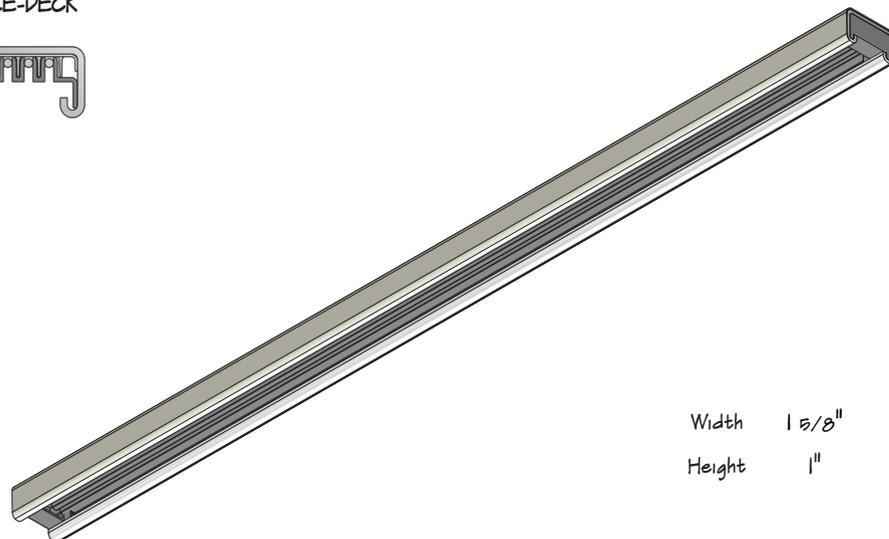

Width 1 5/8"
Height 1"

DOUBLE-DECK

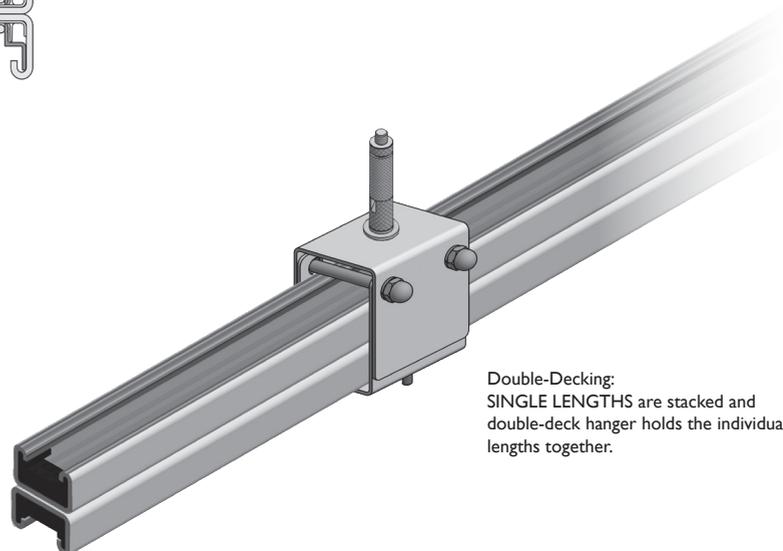

Double-Decking:
SINGLE LENGTHS are stacked and double-deck hanger holds the individual lengths together.

USA TrackBusway™				
SINGLE / DOUBLE-DECK (two single lengths)				
			(L)	(F)
20 AMP	up to 600V MAX.	M20-3-40-600-(L)-(F)-B	2.5' 5' 10' XX' (CUSTOM LENGTH)	G SC W B
40 AMP	up to 600V MAX.	M40-3-80-600-(L)-(F)-B	2.5' 5' 10' XX' (CUSTOM LENGTH)	G SC W B
EMPTY	NON-POWERED	M00-(L)-(F)-B	2.5' 5' 10' XX' (CUSTOM LENGTH)	G SC W B

Finish - G=Galvanized SC=Sleeved Copper W=White B=Black

USA TrackBusway is PREWIRED, 1-5/8" x 1", 12 Ga. steel, 3 Pole busway. Runs, rows, and grids are all "Plug & Play." Specify in galvanized, sleeved copper, white, or black in 2.5', 5', 10', and custom lengths.

Lengths are available in up to 40A and offered in galvanized, sleeved copper, white, or black finishes, with standard lengths of 2.5', 5', 10', and custom sizes.

Each piece features built-in endblocks — no end caps needed — and feeds can be added even after a joiner sleeve, providing maximum flexibility in power-density for your space.

