Choose your Outlet Box

Single-phase equipment supplied from one phase and neutral on T225 busway.



Illustrative device color; actual color varies.

Breakered power where the equipment needs it.
Choose branch amperage, matching equipment connection and outlet arrangement. Then complete the applicable ordering details.

15A/20A/30A
NEMA connections at the supported ratings shown on page 2.

50A / 60A / 100A
IEC Pin & Sleeve. 50A NEMA 5-50 is also offered. Each higher-amperage build has one output. A 50A IEC build uses a 60A-rated device protected by a 50A breaker.

Representative compact enclosure. Mounted receptacle depends on the selected connection. Use the selected configuration sheet for the specified assembly.

Equipment supply	Busway supply
120V line-to-neutral	208Y/120V
240V line-to-neutral	415Y/240V (nominal)
277V line-to-neutral	480Y/277V

Choose the outlet arrangement

Arrangement	Protection and selection
One mounted receptacle	One 1-pole circuit breaker; enclosure follows the selected base.
Multiple outputs	Up to 3 outputs only where listed on page 2. Each branch output has its own 1-pole breaker.
Duplex / quad	20A, 120V 5-20R assembly; two or four receptacle positions share one 1-pole branch circuit.

Download the selected cut sheet after choosing the arrangement. Phase and orientation are not required for that base download. Complete ordering details for a configured sheet.

Build your 1-pole Outlet Box

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Choose the connection

Click a blue catalogue number to open that build. Numbers shown: one output, standard ground, no monitoring. Supported alternatives appear at right.

Breaker / supply	Connection & base catalogue number	Outputs	Grounding / GFCI
15A / 120V L-N	**L5-15R** PT225-C-10-OB-L515R-G	1/2/3	Standard / IG
15A / 277V L-N	**L7-15R** PT225-C-10-OB-L715R-G	1/2/3	Standard
20A / 120V L-N	**5-20R duplex** PT225-S-10-OB-520D-G	1	Standard / IG
20A / 120V L-N	**5-20R quad** PT225-S-10-OB-520Q-G	1	Standard / IG
20A / 120V L-N	**5-20R** PT225-C-10-OB-520R-G	1	Standard / IG
20A / 120V L-N	**L5-20R** PT225-C-10-OB-L520R-G	1/2/3	Standard / IG
20A / 240V L-N	**L7-20R** PT225-C-10-OB-L720R-240LN-1P-G	1	Standard
20A / 277V L-N	**L7-20R** PT225-C-10-OB-L720R-G	1/2/3	Standard
30A / 120V L-N	**L5-30R** PT225-C-10-OB-L530R-G	1/2/3	Standard / IG
30A / 240V L-N	**L7-30R** PT225-C-10-OB-L730R-240LN-1P-G	1	Standard
30A / 277V L-N	**L7-30R** PT225-C-10-OB-L730R-G	1/2/3	Standard
50A / 120V L-N	**360R4W** PT225-C-10-OB-360R4W-CB50-G	1	Standard
50A / 120V L-N	**5-50R** PT225-C-10-OB-550R-CB50-G	1	Standard
60A / 120V L-N	**360R4W** PT225-C-10-OB-360R4W-G	1	Standard
100A / 120V L-N	**3100R4W** PT225-C-10-OB-3100R4W-CB100-G	1	Standard

***GFCI:** standard ground only; never combined with IG. Duplex/quad output count is one assembly. **240V L-N:** 20A Leviton 2330 / plug 2331 / BGL16020; 30A 2630 / plug 2631 / BGL16030. Use the matching L7 plug; the 277V device rating does not change supplied 240V.

IEC matching plugs: 50A/60A HBL360P4W (60A, 125V, 4h); 100A HBL3100P4W (100A, 125V, 4h). The 50A and 100A builds use BGL16050 and BGL16100 breakers, respectively.

Catalogue bases exclude phase and factory orientation. The full fixed base is retained. OB identifies an outlet box with mounted receptacle(s). IG = isolated ground; use only listed combinations.

Compare NEMA & IEC connections
trackbusway.com/products/225a-1-pole-breakered-outlet-box

Read the catalogue number

The selected base supplies the fixed codes. Complete only the applicable order selections.

Example: 30A, 120V L-N, one L5-30R

PT225-C-10-OB-L530R-G	-L2	-R
Base configuration	Phase	Orientation

Code / field	Meaning
PT225	T225 tap-off product prefix.
C-10 / S-10	Compact / standard enclosure designation. Retain the enclosure assigned to the selected configuration.
OB	Outlet box with female receptacle(s) mounted on the enclosure. No drop-cord length field.
L530R	One-pole branch connection from one selected line plus neutral. C identifies a cord connector; R within a device code identifies a mounted receptacle.
IG / GFCI	IG precedes the applicable device code. Retain GFCI where present; it is not combined with IG.
240LN-1P / CB50 / CB100	Retain these fixed identifiers when present. CB50 / CB100 distinguish the breaker rating from the output device rating.
L2 / final R	Choose the phase L1, L2 or L3. Final -T or -R is the separately chosen factory breaker orientation.

Retain the complete fixed base, including its terminal **-G** and any other existing characters. Grounding follows the selected build and applicable **IG** prefix. All examples show deliberate selections, not defaults.

Multiple outputs retain multiple device tokens

PT225-S-10-OB-L530R-L530R-G-L1L2-T

Two outputs, each with its own breaker; typical factory orientation. Fill PHASE in output order: L1L2 means output 1 uses L1 + N and output 2 uses L2 + N. Three outputs on L1, L2 and L3 use L1L2L3. Omit N from the code.

50A example retains the explicit breaker rating

PT225-C-10-OB-360R4W-CB50-G-L2-T

One 60A-rated IEC output protected by a 50A, 1-pole breaker. The output-device rating does not increase the branch rating.


Complete the ordering details

Use these choices in the builder, then download the completed configuration sheet.

Grounding. Choose standard or isolated ground only where offered on page 2. Coordinate with the compatible busway grounding arrangement. GFCI is offered on listed 20A duplex/quad builds with standard ground only.

Power monitoring. Use **Request Power Monitoring** to carry the current configuration into a request. Existing monitored offerings remain request-only at documented ratings; new 50A/100A additions do not include monitoring. Explore critical power monitoring.

Phase connection

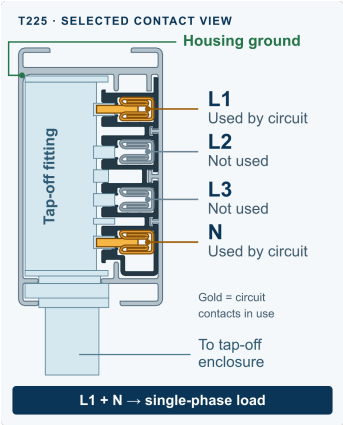


One branch circuit shown


Assign L1, L2 or L3 plus neutral to each independent circuit.
Each separate cord or receptacle assembly has its own 1-pole breaker. A typical triple arrangement is circuit 1: L1-N, circuit 2: L2-N and circuit 3: L3-N. Each output remains single-phase.

Record circuit assignments individually; examples are not preset selections. Duplex/quad assemblies retain their documented shared-branch construction. Confirm the allocation and total connected load with the factory.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.

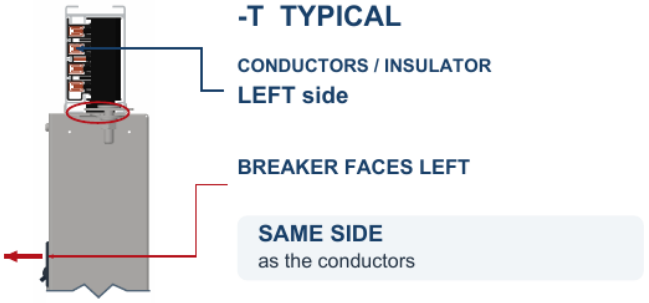

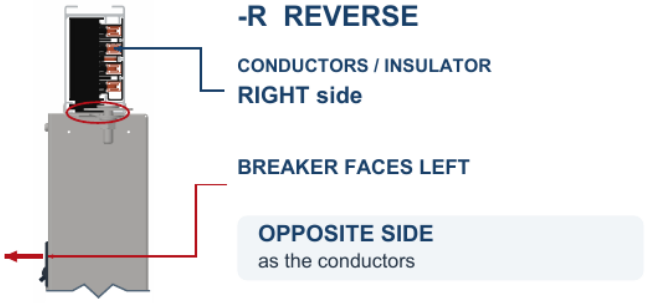

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Mounted outlets. The selected device must match the equipment plug and supply. Outlet Boxes do not require a drop-cord length selection.

Before ordering: confirm supply, branch rating, matching plug, arrangement, grounding, monitoring and applicable phase/orientation choices. **Factory-set. Not field-rotatable.** Specify required assembly SCCR; a component interrupting rating does not establish assembly SCCR. The factory unit label governs.

Build your 1-pole Outlet Box

trackbusway.com/products/225a-1-pole-breakered-outlet-box

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x L5-15R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L515R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

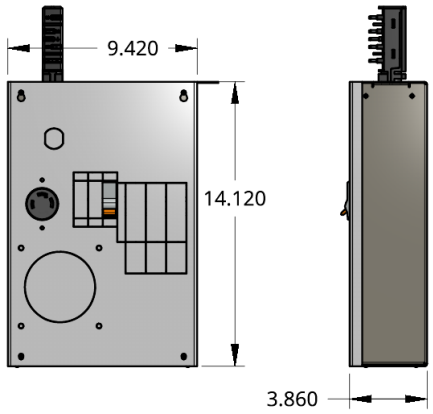

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 15A, 1-pole breaker
B Output	1 x L5-15R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-15R

15A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

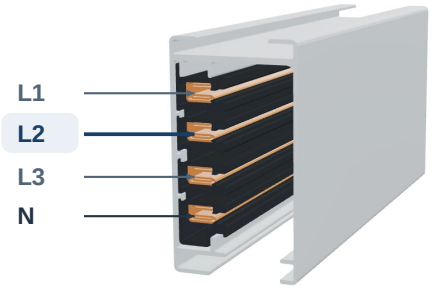

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L515R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L515R-G-L2-T
Reverse: PT225-C-10-OB-L515R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x L5-15R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL515R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

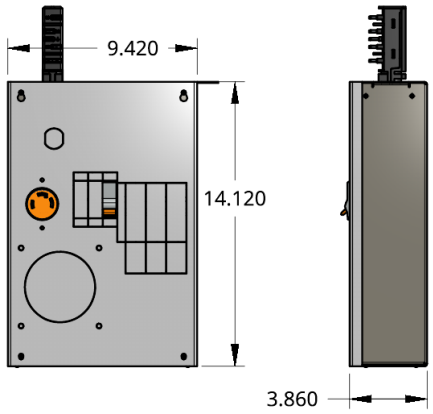

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 15A, 1-pole breaker
B Output	1 x L5-15R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-15R

15A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

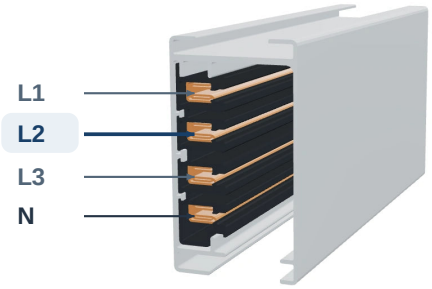

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-IGL515R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL515R-G-L2-T
Reverse: PT225-C-10-OB-IGL515R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 2 x 1-pole / 2 x L5-15R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L515R-L515R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

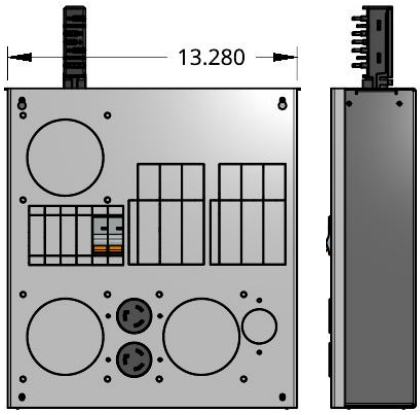

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	2 x 15A, 1-pole breakers; one per output
B Output	2 x L5-15R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-15R

15A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

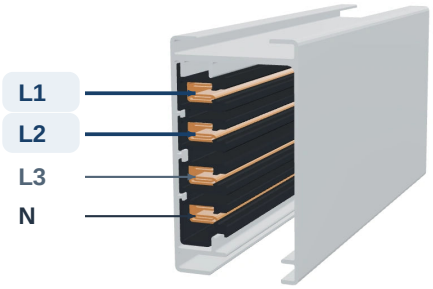

T225 conductor arrangement

2 independent circuits; one 15A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
15A / 1-pole breaker	15A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L515R-L515R-G-L1L2-T
Reverse: PT225-S-10-OB-L515R-L515R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 2 x 1-pole / 2 x L5-15R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL515R-IGL515R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

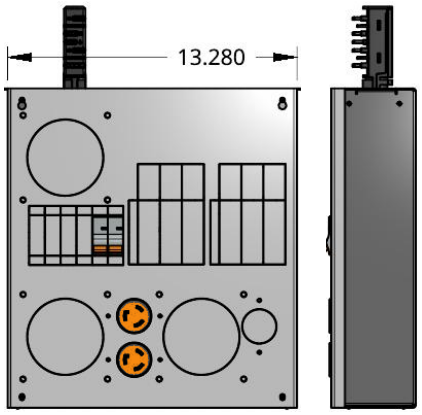

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	2 x 15A, 1-pole breakers; one per output
B Output	2 x L5-15R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/225a-1-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L5-15R

15A, 125V AC device rating
Isolated equipment ground
Neutral included

Phase connection / specify when ordering

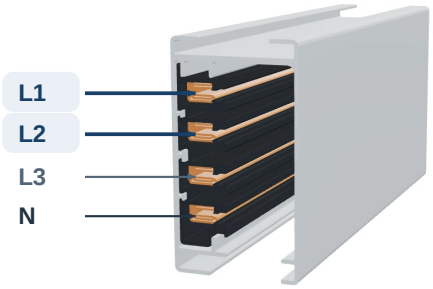

T225 conductor arrangement

2 independent circuits; one 15A, 1-pole breaker per output.

Receptacle 1
15A / 1-pole breaker
L1 + N


Receptacle 2
15A / 1-pole breaker
L2 + N

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL515R-IGL515R-G-L1L2-T
Reverse: PT225-S-10-OB-IGL515R-IGL515R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 3 x 1-pole / 3 x L5-15R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L515R-L515R-L515R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

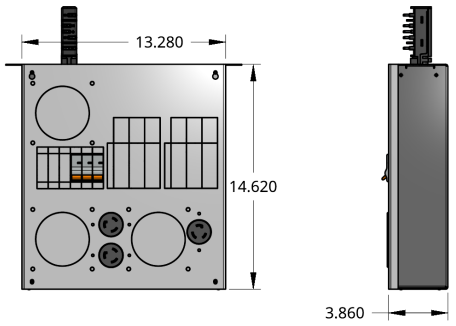

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	3 x 15A, 1-pole breakers; one per output
B Output	3 x L5-15R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-15R

15A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

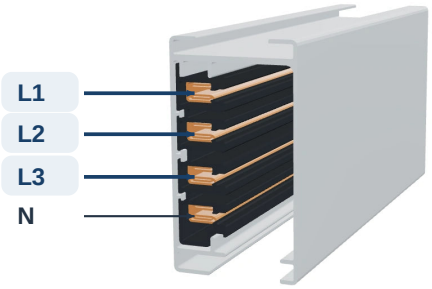

T225 conductor arrangement

3 independent circuits; one 15A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
15A / 1-pole breaker	15A / 1-pole breaker	15A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L515R-L515R-L515R-G-L1L2L3-T
Reverse: PT225-S-10-OB-L515R-L515R-L515R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 3 x 1-pole / 3 x L5-15R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL515R-IGL515R-IGL515R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

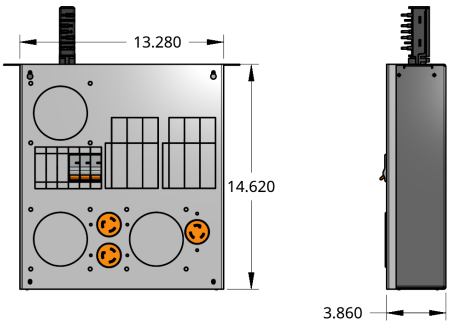

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	3 x 15A, 1-pole breakers; one per output
B Output	3 x L5-15R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-15R

15A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

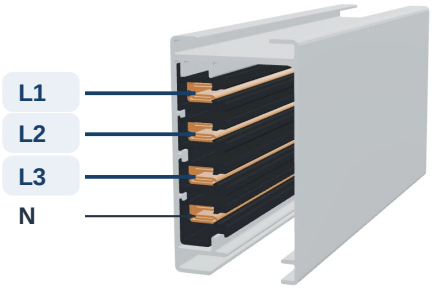

T225 conductor arrangement

3 independent circuits; one 15A, 1-pole breaker per output.

Receptacle 1	Receptacle 2	Receptacle 3
15A / 1-pole breaker	15A / 1-pole breaker	15A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**


[PHASE] = L1L2L3 (shown)

Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL515R-IGL515R-IGL515R-G-L1L2L3-T
Reverse: PT225-S-10-OB-IGL515R-IGL515R-IGL515R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase / 1 x 1-pole / 1 x L7-15R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L715R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

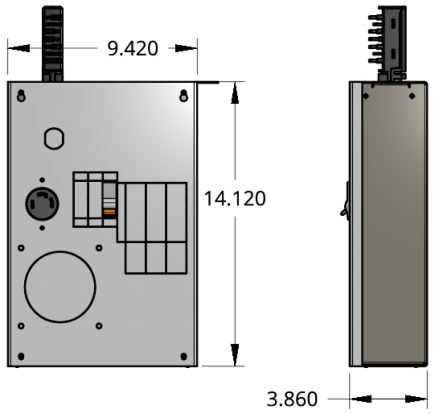

Enclosure views; connection detail at right

Supply	277V, single-phase
A Protection	1 x 15A, 1-pole breaker
B Output	1 x L7-15R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-15R

15A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

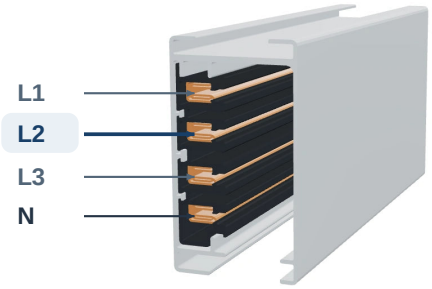

T225 conductor arrangement

For this **277V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L715R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L715R-G-L2-T
Reverse: PT225-C-10-OB-L715R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase per output / 2 x 1-pole / 2 x L7-15R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L715R-L715R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

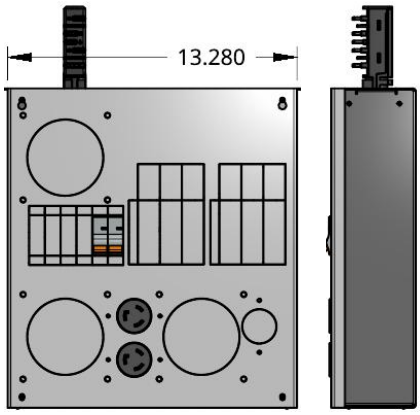

Enclosure views; connection detail at right

Supply	277V, single-phase per output
A Protection	2 x 15A, 1-pole breakers; one per output
B Output	2 x L7-15R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-15R

15A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

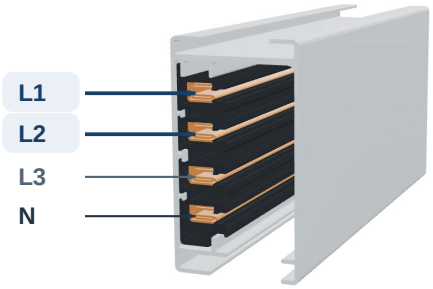

T225 conductor arrangement

2 independent circuits; one 15A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
15A / 1-pole breaker	15A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L715R-L715R-G-L1L2-T
Reverse: PT225-S-10-OB-L715R-L715R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 15A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase per output / 3 x 1-pole / 3 x L7-15R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L715R-L715R-L715R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

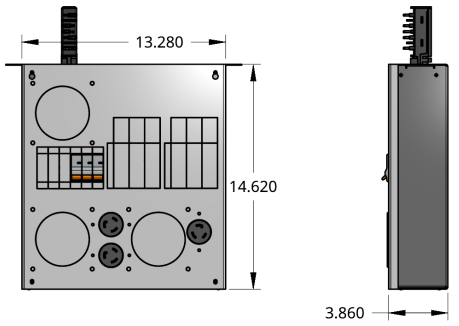

Enclosure views; connection detail at right

Supply	277V, single-phase per output
A Protection	3 x 15A, 1-pole breakers; one per output
B Output	3 x L7-15R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-15R

15A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

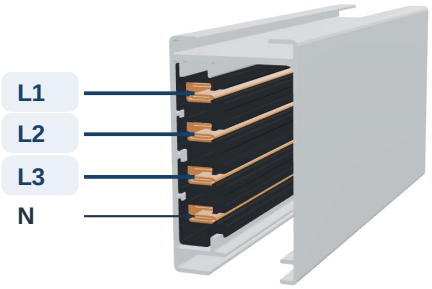

T225 conductor arrangement

3 independent circuits; one 15A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
15A / 1-pole breaker	15A / 1-pole breaker	15A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L715R-L715R-L715R-G-L1L2L3-T
Reverse: PT225-S-10-OB-L715R-L715R-L715R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / Duplex 5-20R receptacle assembly

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-520D-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

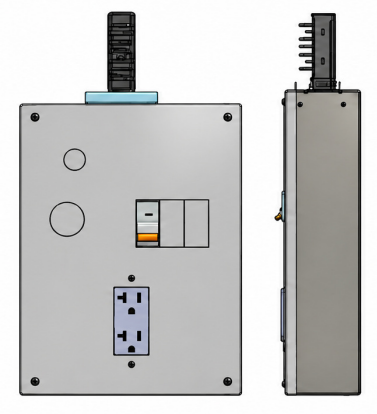

Front + side views

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	Duplex 5-20R receptacle assembly
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




5-20R

20A, 125V AC device rating
Two outlets / one branch
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

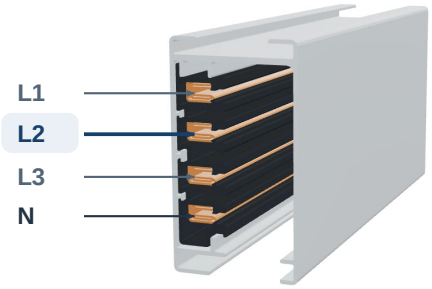

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-S-10-OB-520D-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-S-10-OB-520D-G-L2-T
Reverse: PT225-S-10-OB-520D-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / Duplex 5-20R receptacle assembly

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IG520D-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

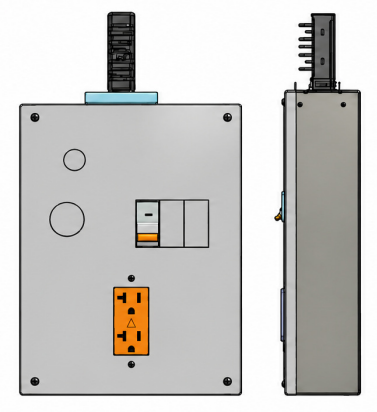

Front + side views

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	Duplex 5-20R receptacle assembly
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




5-20R

20A, 125V AC device rating
Two outlets / one branch
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

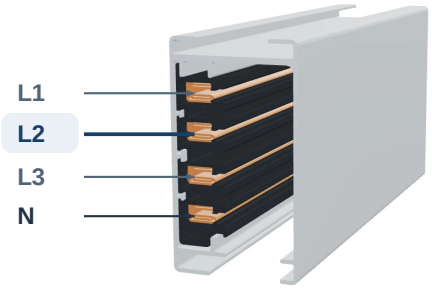

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-S-10-OB-IG520D-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-S-10-OB-IG520D-G-L2-T
Reverse: PT225-S-10-OB-IG520D-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / Quad 5-20R receptacle assembly

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-520Q-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

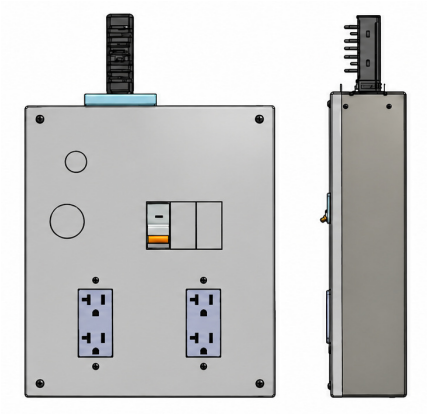

Front + side views

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	Quad 5-20R receptacle assembly
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




5-20R

20A, 125V AC device rating
Four outlets / one branch
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

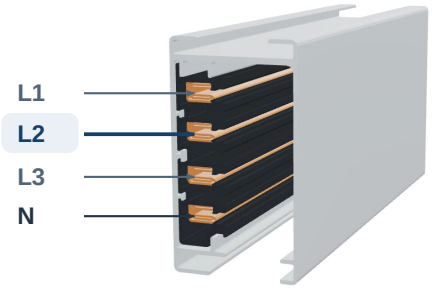

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-S-10-OB-520Q-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-S-10-OB-520Q-G-L2-T
Reverse: PT225-S-10-OB-520Q-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / Quad 5-20R receptacle assembly

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IG520Q-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

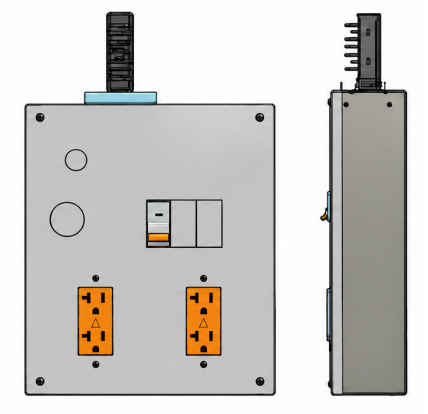


Front + side views

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	Quad 5-20R receptacle assembly
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/225a-1-pole-breakered-outlet-box


B OUTLET RECEPTACLE



5-20R

20A, 125V AC device rating
Four outlets / one branch
Isolated equipment ground
Neutral included

Specify when ordering

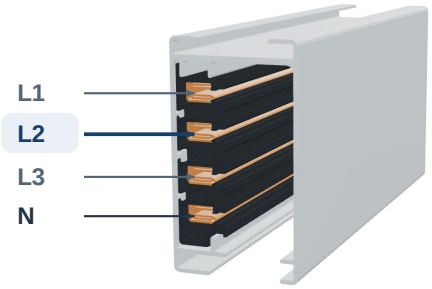

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-S-10-OB-IG520Q-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length

Typical: PT225-S-10-OB-IG520Q-G-L2-T
Reverse: PT225-S-10-OB-IG520Q-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x 5-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

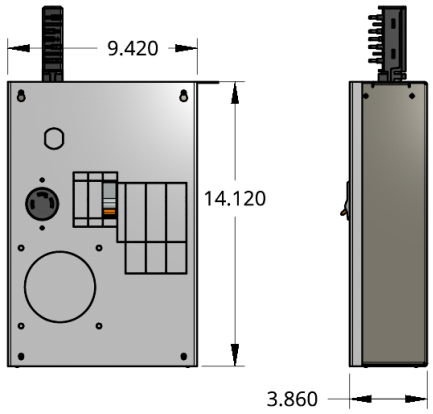

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	1 x 5-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




5-20R

20A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

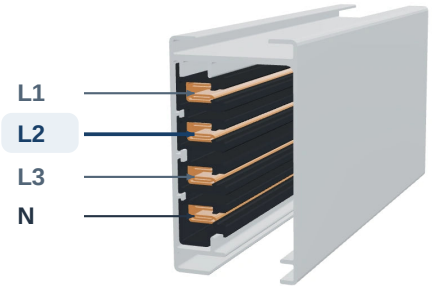

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-520R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-520R-G-L2-T
Reverse: PT225-C-10-OB-520R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x 5-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IG520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

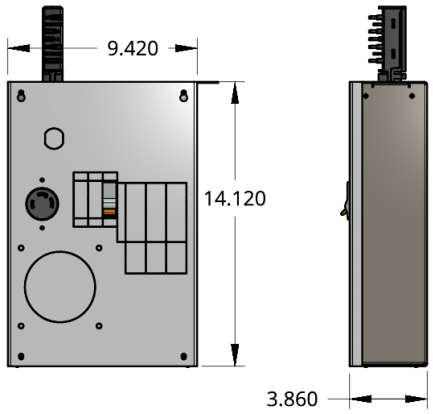

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	1 x 5-20R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




5-20R

20A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

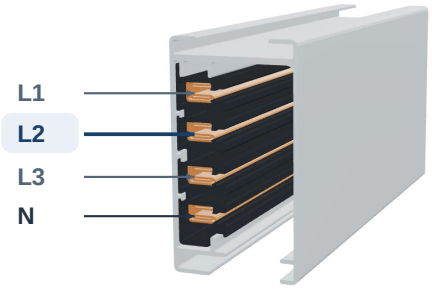

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-IG520R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IG520R-G-L2-T
Reverse: PT225-C-10-OB-IG520R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x L5-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

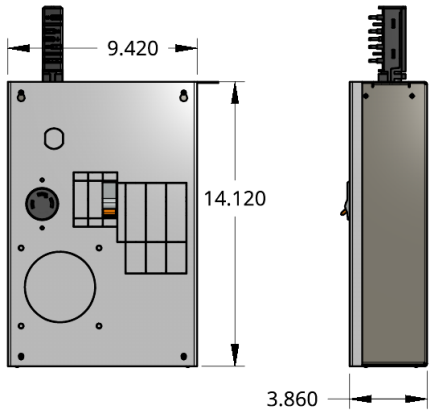

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	1 x L5-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-20R

20A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

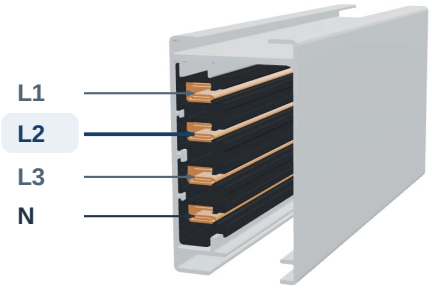

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L520R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L520R-G-L2-T
Reverse: PT225-C-10-OB-L520R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x L5-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

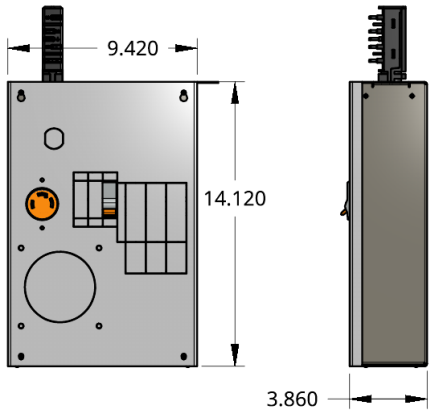

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	1 x L5-20R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-20R

20A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

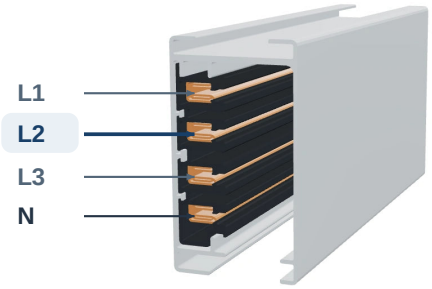

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-IGL520R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL520R-G-L2-T
Reverse: PT225-C-10-OB-IGL520R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 2 x 1-pole / 2 x L5-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L520R-L520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

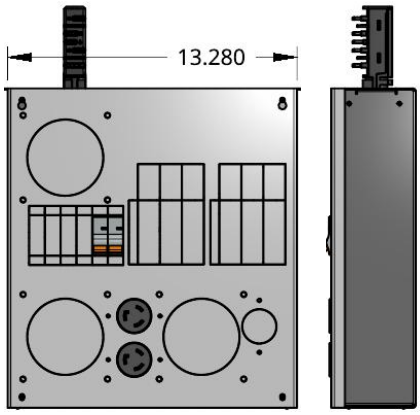

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	2 x 20A, 1-pole breakers; one per output
B Output	2 x L5-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/225a-1-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L5-20R

20A, 125V AC device rating
Equipment ground included
Neutral included

Phase connection / specify when ordering

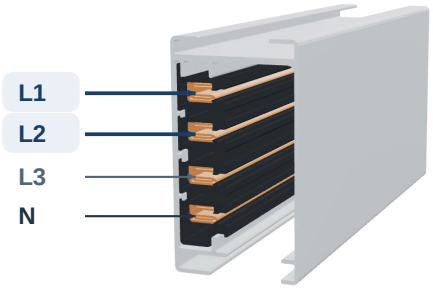

T225 conductor arrangement

2 independent circuits; one 20A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
20A / 1-pole breaker	20A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L520R-L520R-G-L1L2-T
Reverse: PT225-S-10-OB-L520R-L520R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 2 x 1-pole / 2 x L5-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL520R-IGL520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

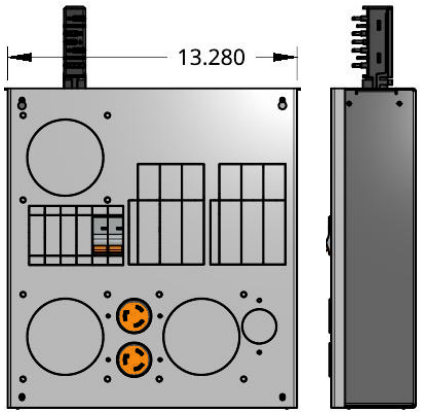

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	2 x 20A, 1-pole breakers; one per output
B Output	2 x L5-20R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-20R

20A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

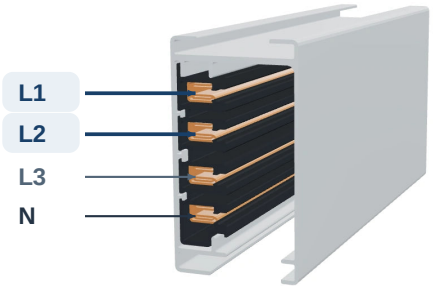

T225 conductor arrangement

2 independent circuits; one 20A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
20A / 1-pole breaker	20A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL520R-IGL520R-G-L1L2-T
Reverse: PT225-S-10-OB-IGL520R-IGL520R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 3 x 1-pole / 3 x L5-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L520R-L520R-L520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

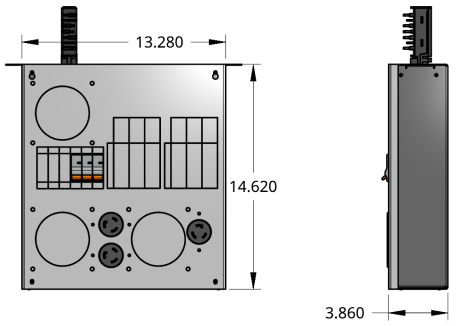

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	3 x 20A, 1-pole breakers; one per output
B Output	3 x L5-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-20R

20A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

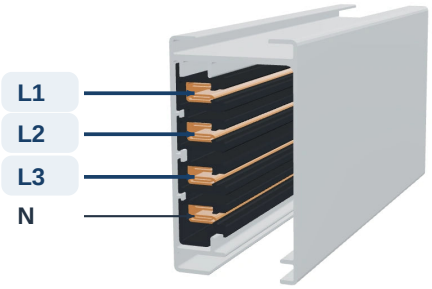

T225 conductor arrangement

3 independent circuits; one 20A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
20A / 1-pole breaker	20A / 1-pole breaker	20A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L520R-L520R-L520R-G-L1L2L3-T
Reverse: PT225-S-10-OB-L520R-L520R-L520R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 3 x 1-pole / 3 x L5-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL520R-IGL520R-IGL520R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

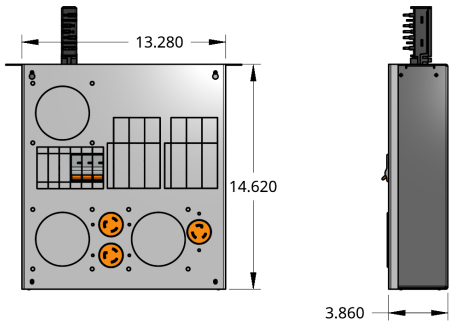

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	3 x 20A, 1-pole breakers; one per output
B Output	3 x L5-20R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-20R

20A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

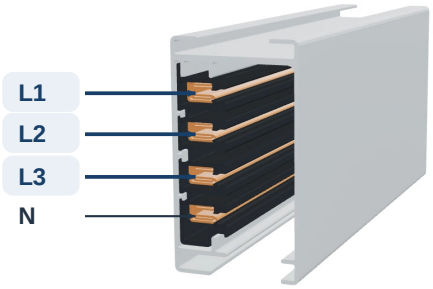

T225 conductor arrangement

3 independent circuits; one 20A, 1-pole breaker per output.

Receptacle 1	Receptacle 2	Receptacle 3
20A / 1-pole breaker	20A / 1-pole breaker	20A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**


[PHASE] = L1L2L3 (shown)

Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL520R-IGL520R-IGL520R-G-L1L2L3-T
Reverse: PT225-S-10-OB-IGL520R-IGL520R-IGL520R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

240V line-to-neutral; 415Y/240V or 416Y/240V / 1 x 1-pole / 1 x L7-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L720R-240LN-1P-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

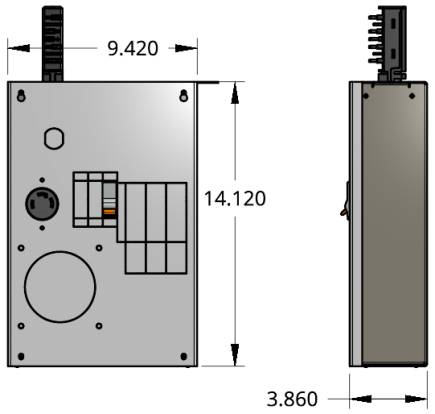


Enclosure views; connection detail at right

Supply	240V line-to-neutral; 415Y/240V or 416Y/240V
A Protection	1 x 20A, 1-pole Schneider BGL16020
B Output	1 x L7-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/225a-1-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L7-20R

20A, 277V AC device rating
Leviton 2330
Requires L7-20P
Plug: Leviton 2331
Output: 240V L-N

Specify when ordering

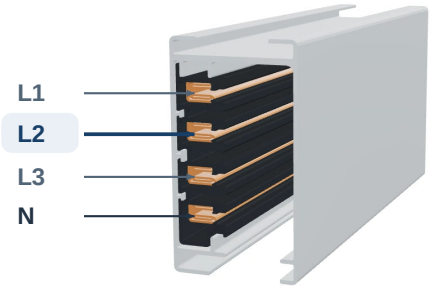

T225 conductor arrangement

For this **240V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L720R-240LN-1P-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L720R-240LN-1P-G-L2-T
Reverse: PT225-C-10-OB-L720R-240LN-1P-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase / 1 x 1-pole / 1 x L7-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L720R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

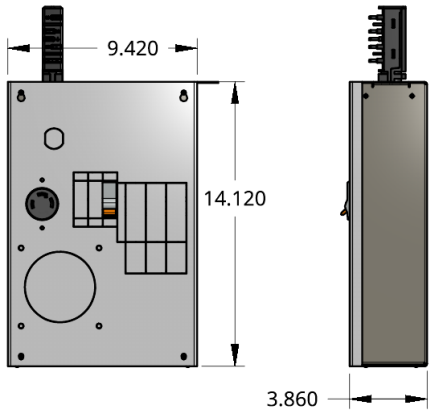

Enclosure views; connection detail at right

Supply	277V, single-phase
A Protection	1 x 20A, 1-pole breaker
B Output	1 x L7-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-20R

20A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

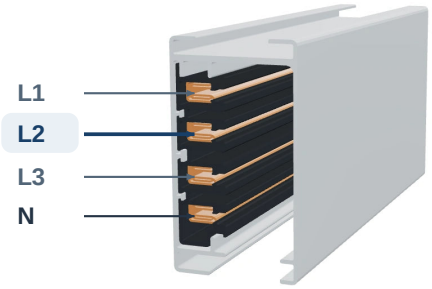

T225 conductor arrangement

For this **277V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L720R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L720R-G-L2-T
Reverse: PT225-C-10-OB-L720R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase per output / 2 x 1-pole / 2 x L7-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L720R-L720R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

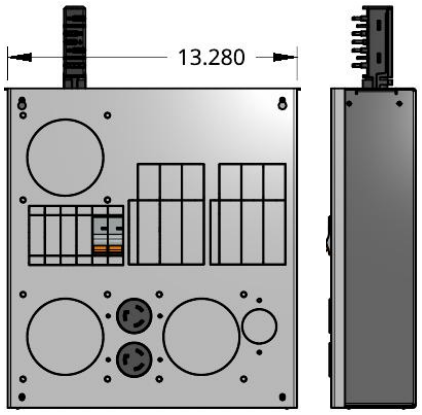

Enclosure views; connection detail at right

Supply	277V, single-phase per output
A Protection	2 x 20A, 1-pole breakers; one per output
B Output	2 x L7-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-20R

20A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

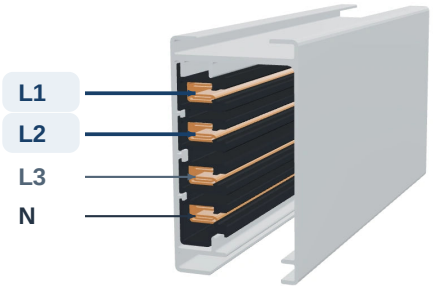

T225 conductor arrangement

2 independent circuits; one 20A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
20A / 1-pole breaker	20A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L720R-L720R-G-L1L2-T
Reverse: PT225-S-10-OB-L720R-L720R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase per output / 3 x 1-pole / 3 x L7-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L720R-L720R-L720R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

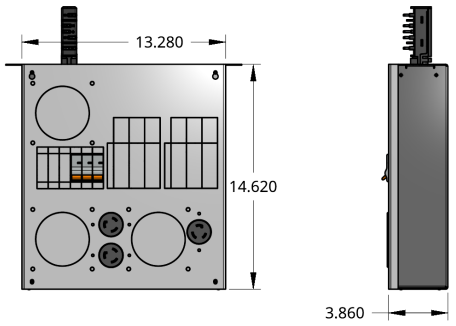

Enclosure views; connection detail at right

Supply	277V, single-phase per output
A Protection	3 x 20A, 1-pole breakers; one per output
B Output	3 x L7-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-20R

20A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

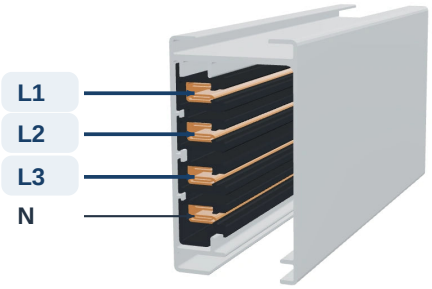

T225 conductor arrangement

3 independent circuits; one 20A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
20A / 1-pole breaker	20A / 1-pole breaker	20A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L720R-L720R-L720R-G-L1L2L3-T
Reverse: PT225-S-10-OB-L720R-L720R-L720R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x L5-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L530R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

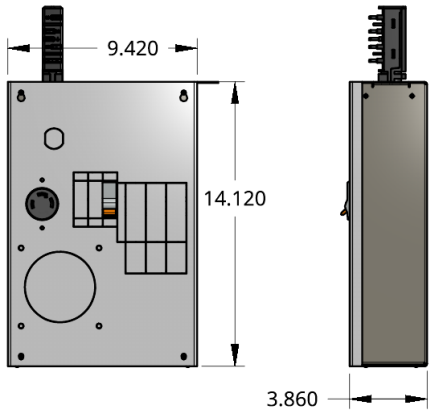

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 30A, 1-pole breaker
B Output	1 x L5-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-30R

30A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

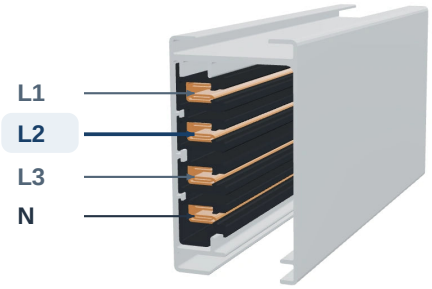

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L530R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L530R-G-L2-T
Reverse: PT225-C-10-OB-L530R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x L5-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL530R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

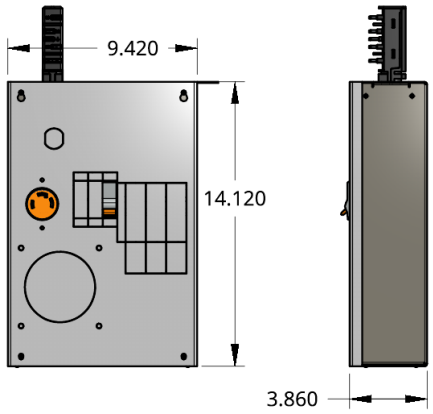

Enclosure views; connection detail at right

Supply	120V, single-phase
A Protection	1 x 30A, 1-pole breaker
B Output	1 x L5-30R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-30R

30A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

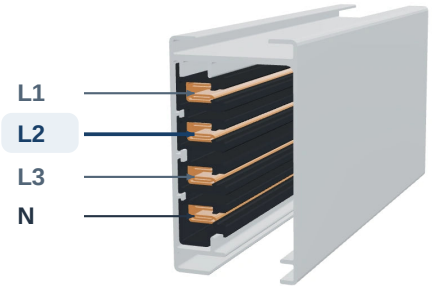

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-IGL530R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL530R-G-L2-T
Reverse: PT225-C-10-OB-IGL530R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 2 x 1-pole / 2 x L5-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L530R-L530R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

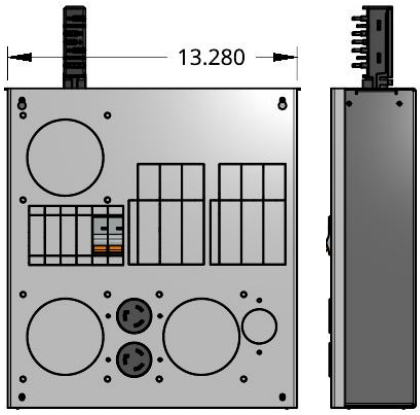

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	2 x 30A, 1-pole breakers; one per output
B Output	2 x L5-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-30R

30A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

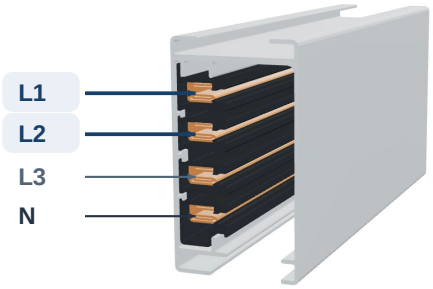

T225 conductor arrangement

2 independent circuits; one 30A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
30A / 1-pole breaker	30A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L530R-L530R-G-L1L2-T
Reverse: PT225-S-10-OB-L530R-L530R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 2 x 1-pole / 2 x L5-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL530R-IGL530R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

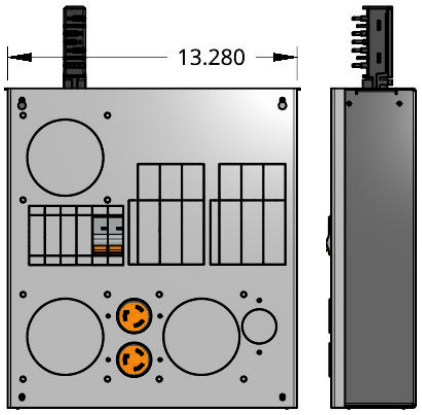

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	2 x 30A, 1-pole breakers; one per output
B Output	2 x L5-30R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-30R

30A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

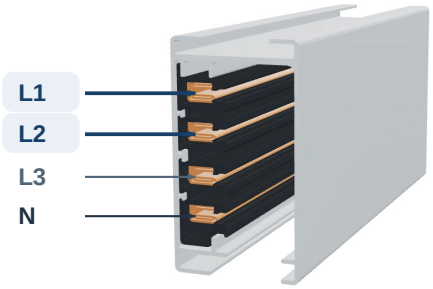

T225 conductor arrangement

2 independent circuits; one 30A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
30A / 1-pole breaker	30A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL530R-IGL530R-G-L1L2-T
Reverse: PT225-S-10-OB-IGL530R-IGL530R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 3 x 1-pole / 3 x L5-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L530R-L530R-L530R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

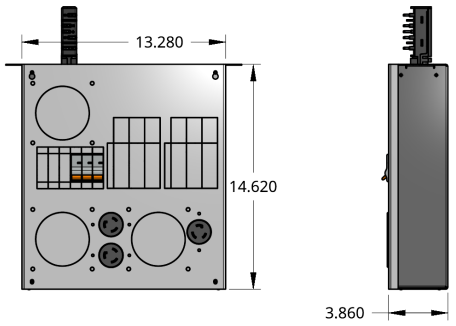

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	3 x 30A, 1-pole breakers; one per output
B Output	3 x L5-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-30R

30A, 125V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

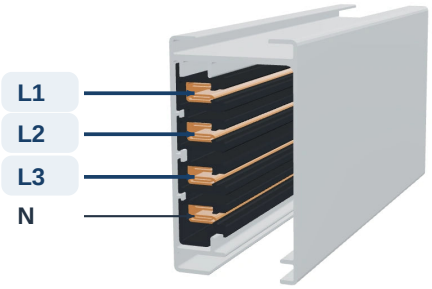

T225 conductor arrangement

3 independent circuits; one 30A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
30A / 1-pole breaker	30A / 1-pole breaker	30A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L530R-L530R-L530R-G-L1L2L3-T
Reverse: PT225-S-10-OB-L530R-L530R-L530R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase per output / 3 x 1-pole / 3 x L5-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL530R-IGL530R-IGL530R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

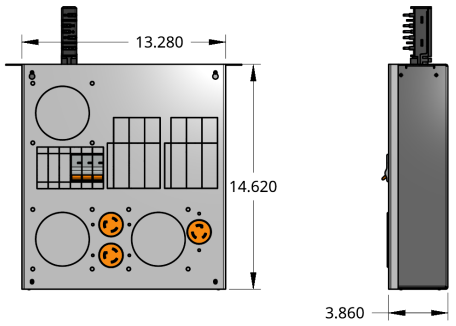

Enclosure views; connection detail at right

Supply	120V, single-phase per output
A Protection	3 x 30A, 1-pole breakers; one per output
B Output	3 x L5-30R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L5-30R

30A, 125V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

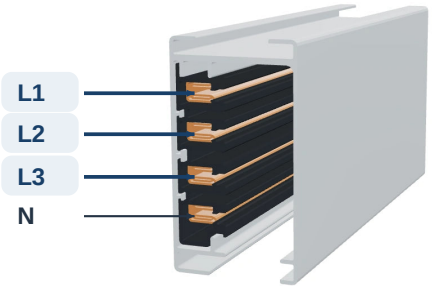

T225 conductor arrangement

3 independent circuits; one 30A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
30A / 1-pole breaker	30A / 1-pole breaker	30A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL530R-IGL530R-IGL530R-G-L1L2L3-T
Reverse: PT225-S-10-OB-IGL530R-IGL530R-IGL530R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

240V line-to-neutral; 415Y/240V or 416Y/240V / 1 x 1-pole / 1 x L7-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L730R-240LN-1P-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

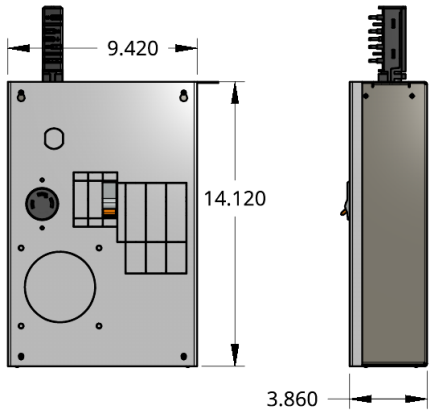


Enclosure views; connection detail at right

Supply	240V line-to-neutral; 415Y/240V or 416Y/240V
A Protection	1 x 30A, 1-pole Schneider BGL16030
B Output	1 x L7-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/225a-1-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L7-30R

30A, 277V AC device rating
Leviton 2630
Requires L7-30P
Plug: Leviton 2631
Output: 240V L-N

Specify when ordering

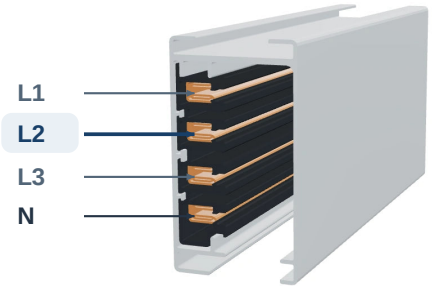

T225 conductor arrangement

For this **240V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L730R-240LN-1P-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L730R-240LN-1P-G-L2-T
Reverse: PT225-C-10-OB-L730R-240LN-1P-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase / 1 x 1-pole / 1 x L7-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L730R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

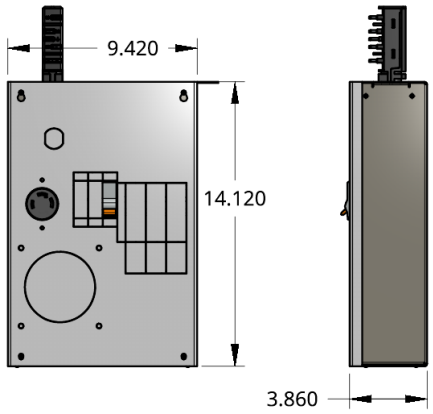

Enclosure views; connection detail at right

Supply	277V, single-phase
A Protection	1 x 30A, 1-pole breaker
B Output	1 x L7-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-30R

30A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

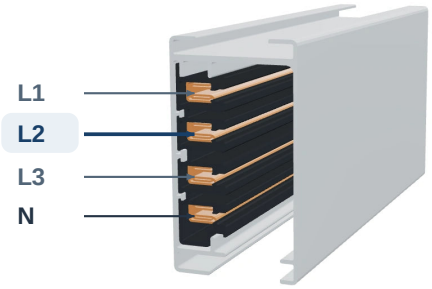

T225 conductor arrangement

For this **277V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-L730R-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L730R-G-L2-T
Reverse: PT225-C-10-OB-L730R-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase per output / 2 x 1-pole / 2 x L7-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L730R-L730R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

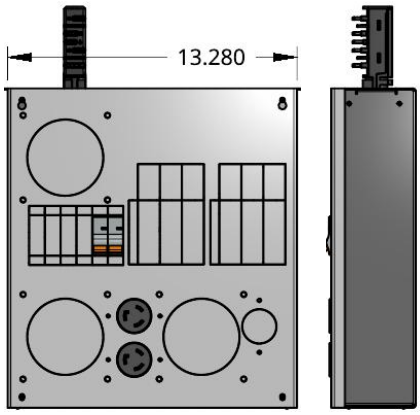

Enclosure views; connection detail at right

Supply	277V, single-phase per output
A Protection	2 x 30A, 1-pole breakers; one per output
B Output	2 x L7-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-30R

30A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

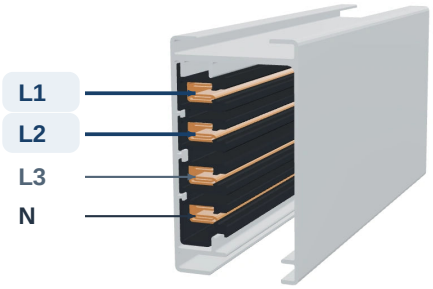

T225 conductor arrangement

2 independent circuits; one 30A, 1-pole breaker per output.


Receptacle 1	Receptacle 2
30A / 1-pole breaker	30A / 1-pole breaker
L1 + N	**L2 + N**

[PHASE] = L1L2 (shown)
Output order: 1 = L1; 2 = L2. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L730R-L730R-G-L1L2-T
Reverse: PT225-S-10-OB-L730R-L730R-G-L1L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

277V, single-phase per output / 3 x 1-pole / 3 x L7-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L730R-L730R-L730R-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Each circuit shown below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

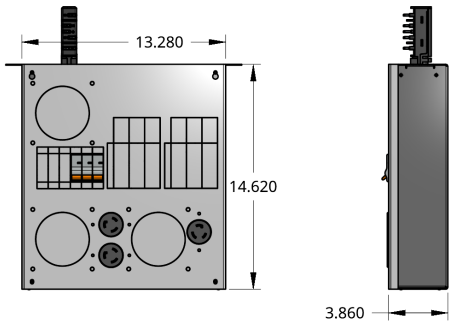

Enclosure views; connection detail at right

Supply	277V, single-phase per output
A Protection	3 x 30A, 1-pole breakers; one per output
B Output	3 x L7-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L7-30R

30A, 277V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Phase connection / specify when ordering

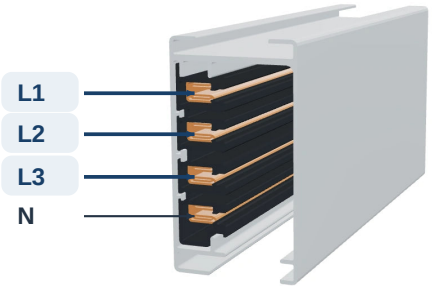

T225 conductor arrangement

3 independent circuits; one 30A, 1-pole breaker per output.


Receptacle 1	Receptacle 2	Receptacle 3
30A / 1-pole breaker	30A / 1-pole breaker	30A / 1-pole breaker
L1 + N	**L2 + N**	**L3 + N**

[PHASE] = L1L2L3 (shown)
Output order: 1 = L1; 2 = L2; 3 = L3. N not in code.

Shown circuit assignments are examples, not preset selections. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L730R-L730R-L730R-G-L1L2L3-T
Reverse: PT225-S-10-OB-L730R-L730R-L730R-G-L1L2L3-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL360R4W | 120V L-N | 1-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-360R4W-CB50-G-[PHASE]-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/225a-1-pole-breakered-outlet-box

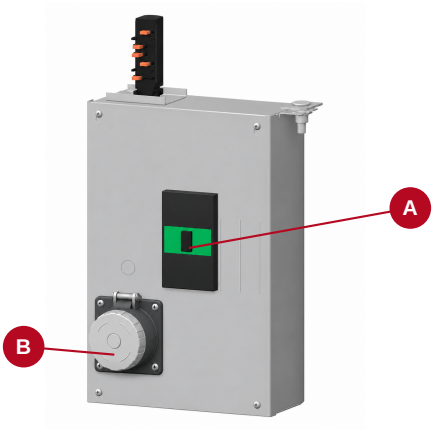

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL16050

50A / 1-pole

B MOUNTED RECEPTACLE




HBL360R4W

Female output

Assembly rating	50A, 120V L-N
A Circuit breaker	Schneider BGL16050 / 50A, 1-pole
B Output	HBL360R4W / Mounted female receptacle
Device rating	60A, 125V; 3 contacts / 4h
Conductors	L + N + G
Matching plug	HBL360P4W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

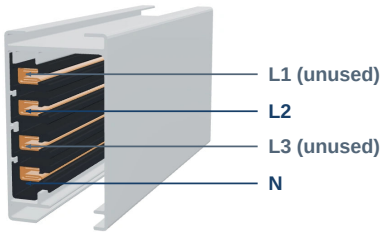

G: bonded housing

PHASE CONNECTION / [PHASE] = L2 (shown)


L2 + N + G

Select L1, L2 or L3. One breaker pole protects the selected line. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-360R4W-CB50-G-L2-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-360R4W-CB50-G-L2-T
Reverse: PT225-C-10-OB-360R4W-CB50-G-L2-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™ 50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL9360 | 120V L-N | 1-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-550R-CB50-G-[PHASE]-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/225a-1-pole-breakered-outlet-box

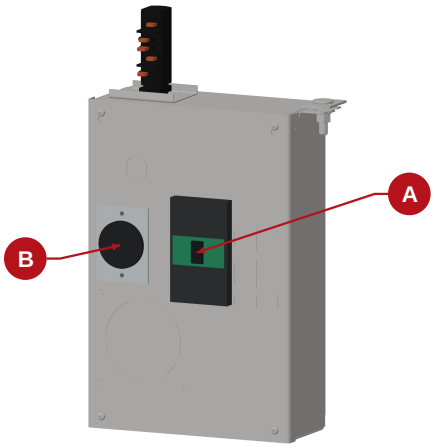

REPRESENTATIVE C-10 ASSEMBLY

GLB enclosure; illustrative device locations.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL16050

50A / 1-pole

B MOUNTED RECEPTACLE




HBL9360

Female output

Assembly rating	50A, 120V L-N
A Circuit breaker	Schneider BGL16050 / 50A, 1-pole
B Output	HBL9360 / Mounted female receptacle
Device rating	50A, 125V
Conductors	L + N + G
Matching plug	HBL9361 (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

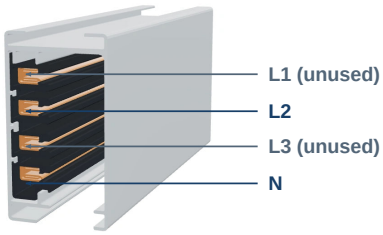

G: bonded housing

PHASE CONNECTION / [PHASE] = L2 (shown)


L2 + N + G

Select L1, L2 or L3. One breaker pole protects the selected line. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-550R-CB50-G-L2-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-550R-CB50-G-L2-T
Reverse: PT225-C-10-OB-550R-CB50-G-L2-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™ 60A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

120V, single-phase / 1 x 1-pole / 1 x 360R4W receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS

PT225-C-10-OB-360R4W-G-[PHASE]-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
Select connection below

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION



Representative assembly
Body dimensions shown in table.

Supply	120V, single-phase
A Protection	1 x 60A, 1-pole MCB
B Output	1 x 360R4W receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




360R4W

60A, 125V AC device rating
3 contacts / 4h
Equipment ground included
Neutral included

trackbusway.com/products/225a-1-pole-breakered-outlet-box

Specify when ordering

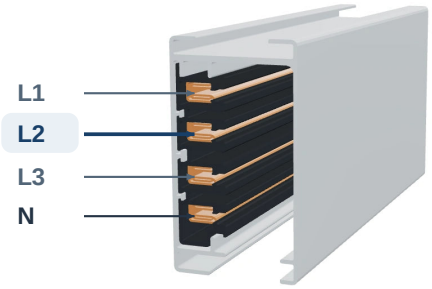

T225 conductor arrangement

For this **120V, 1-pole** configuration, choose **one phase + neutral**.

L1 + N	L2 + N	L3 + N
Alternative	EXAMPLE	Alternative


FILL [PHASE]: L2 (example shown)

PT225-C-10-OB-360R4W-G-L2-[T/R]

Highlighted phase connection is an ordering example, not a preset selection. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-360R4W-G-L2-T
Reverse: PT225-C-10-OB-360R4W-G-L2-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™
100A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL3100R4W | 120V L-N | 1-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-3100R4W-CB100-G-[PHASE]-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/225a-1-pole-breakered-outlet-box

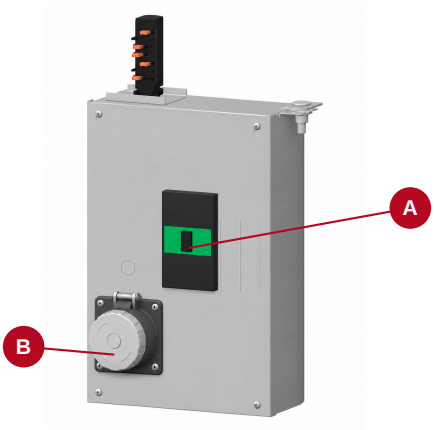

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL16100

100A / 1-pole

B MOUNTED RECEPTACLE




HBL3100R4W

Female output

Assembly rating	100A, 120V L-N
A Circuit breaker	Schneider BGL16100 / 100A, 1-pole
B Output	HBL3100R4W / Mounted female receptacle
Device rating	100A, 125V; 3 contacts / 4h
Conductors	L + N + G
Matching plug	HBL3100P4W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

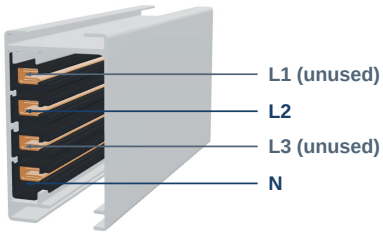

G: bonded housing

PHASE CONNECTION / [PHASE] = L2 (shown)


L2 + N + G

Select L1, L2 or L3. One breaker pole protects the selected line. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-3100R4W-CB100-G-L2-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-3100R4W-CB100-G-L2-T
Reverse: PT225-C-10-OB-3100R4W-CB100-G-L2-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.