Choose your Outlet Box

Three-phase equipment supplied from L1, L2 and L3 on T225 busway.



Illustrative device color; actual color varies.

Breakered power where the equipment needs it.
Choose branch amperage, matching equipment connection and outlet arrangement. Then complete the applicable ordering details.

20A/30A
NEMA connections at the supported ratings shown on page 2.

50A / 60A / 100A
IEC Pin & Sleeve. 50A NEMA 15-50 is also offered. Each higher-amperage build has one output. A 50A IEC build uses a 60A-rated device protected by a 50A breaker.

Representative compact enclosure. Mounted receptacle depends on the selected connection. Use the selected configuration sheet for the specified assembly.

Equipment supply	Busway supply
208V 3-phase; neutral where specified	208Y/120V
480V 3-phase; neutral where specified	480Y/277V

Choose the outlet arrangement

Arrangement	Protection and selection
One mounted receptacle	One 3-pole circuit breaker; enclosure follows the selected base.
Multiple outputs	Up to 2 outputs only where listed on page 2. Each branch output has its own 3-pole breaker.

Download the selected cut sheet after choosing the arrangement. Factory orientation is not required for that base download. Complete ordering details for a configured sheet.

Build your 3-pole Outlet Box

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Choose the connection

Click a blue catalogue number to open that build. Numbers shown: one output, standard ground, no monitoring. Supported alternatives appear at right.

Breaker / supply	Connection & base catalogue number	Outputs	Grounding / GFCI
20A / 208V 3-ph	**L15-20R** PT225-C-10-OB-L1520R-G	1/2	Standard / IG
20A / 208Y/120V	**L21-20R** PT225-C-10-OB-L2120R-G	1/2	Standard / IG
20A / 480V 3-ph	**L16-20R** PT225-C-10-OB-L1620R-G	1/2	Standard
20A / 480Y/277V	**L22-20R** PT225-C-10-OB-L2220R-G	1/2	Standard / IG
30A / 208V 3-ph	**L15-30R** PT225-C-10-OB-L1530R-G	1/2	Standard / IG
30A / 208Y/120V	**L21-30R** PT225-C-10-OB-L2130R-G	1/2	Standard / IG
30A / 480V 3-ph	**L16-30R** PT225-C-10-OB-L1630R-G	1/2	Standard
30A / 480Y/277V	**L22-30R** PT225-C-10-OB-L2230R-G	1/2	Standard / IG
50A / 208V 3-ph	**15-50R** PT225-C-10-OB-1550R-CB50-G	1	Standard
50A / 208V 3-ph	**460R9W** PT225-C-10-OB-460R9W-CB50-G	1	Standard
50A / 208Y/120V	**560R9W** PT225-C-10-OB-560R9W-CB50-G	1	Standard
50A / 480V 3-ph	**460R7W** PT225-C-10-OB-460R7W-CB50-G	1	Standard
50A / 480Y/277V	**560R7W** PT225-C-10-OB-560R7W-CB50-G	1	Standard
60A / 208V 3-ph	**460R9W** PT225-C-10-OB-460R9W-G	1	Standard
60A / 208Y/120V	**560R9W** PT225-C-10-OB-560R9W-G	1	Standard
60A / 480V 3-ph	**460R7W** PT225-C-10-OB-460R7W-G	1	Standard
60A / 480Y/277V	**560R7W** PT225-C-10-OB-560R7W-G	1	Standard
100A / 208V 3-ph	**4100R9W** PT225-C-10-OB-4100R9W-CB100-G	1	Standard
100A / 208Y/120V	**5100R9W** PT225-C-10-OB-5100R9W-CB100-G	1	Standard
100A / 480V 3-ph	**4100R7W** PT225-C-10-OB-4100R7W-CB100-G	1	Standard
100A / 480Y/277V	**5100R7W** PT225-C-10-OB-5100R7W-CB100-G	1	Standard

Compare NEMA & IEC connections
trackbusway.com/products/t225-3-pole-breakered-outlet-box

Read the catalogue number

The selected base supplies the fixed codes. Complete only the applicable order selections.

Example: 30A, 208V 3-ph, one L15-30R

PT225-C-10-OB-L1530R-G
Base configuration

-R
Orientation

Code / field	Meaning
PT225	T225 tap-off product prefix.
C-10 / S-10	Compact / standard enclosure designation. Retain the enclosure assigned to the selected configuration.
OB	Outlet box with female receptacle(s) mounted on the enclosure. No drop-cord length field.
L1530R	Three-pole branch connection from all three phases; neutral only where the device requires it. C identifies a cord connector; R within a device code identifies a mounted receptacle.
IG	IG precedes the applicable device code. Only the matrix combinations are offered.
CB50 / CB100	Retain these fixed identifiers when present. CB50 / CB100 distinguish the breaker rating from the output device rating.
Final T / R	All three phases are connected. No phase suffix is added. Final -T or -R is the separately chosen factory breaker orientation.

Retain the complete fixed base, including its terminal **-G** and any other existing characters. Grounding follows the selected build and applicable **IG** prefix. All examples show deliberate selections, not defaults.

Multiple outputs retain multiple device tokens

PT225-S-10-OB-L1530R-L1530R-G-T

Two outputs, each with its own breaker; typical factory orientation. Phase connection is fixed: L1 + L2 + L3 for each output. No phase entry is required.

50A example retains the explicit breaker rating

PT225-C-10-OB-460R9W-CB50-G-T

One 60A-rated IEC output protected by a 50A, 3-pole breaker. The output-device rating does not increase the branch rating.


Complete the ordering details

Use these choices in the builder, then download the completed configuration sheet.

Grounding. Choose standard or isolated ground only where offered on page 2. Coordinate with the compatible busway grounding arrangement.

Power monitoring. Use **Request Power Monitoring** to carry the current configuration into a request. Existing monitored offerings remain request-only at documented ratings; new 50A/100A additions do not include monitoring. Explore critical power monitoring.

Phase connection

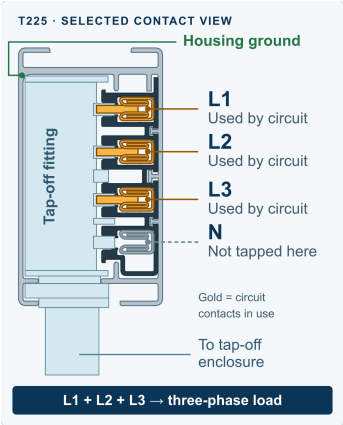


One branch circuit shown


Each output connects to L1 + L2 + L3.
Each output has its own 3-pole breaker protecting its three lines. No separate phase choice or suffix is required. Neutral is included only where specified; equipment ground is retained.

Record circuit assignments individually; examples are not preset selections. Confirm the allocation and total connected load with the factory.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.

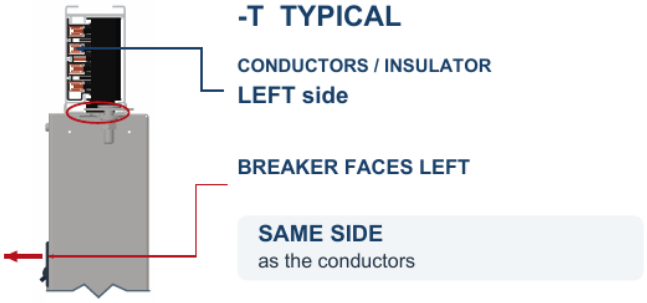

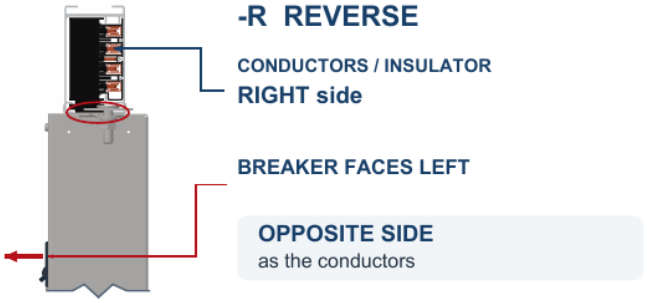

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Mounted outlets. The selected device must match the equipment plug and supply. Outlet Boxes do not require a drop-cord length selection.

Before ordering: confirm supply, branch rating, matching plug, arrangement, grounding, monitoring and applicable phase/orientation choices. **Factory-set. Not field-rotatable.** Specify required assembly SCCR; a component interrupting rating does not establish assembly SCCR. The factory unit label governs.

Build your 3-pole Outlet Box

trackbusway.com/products/t225-3-pole-breakered-outlet-box

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L15-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L1520R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

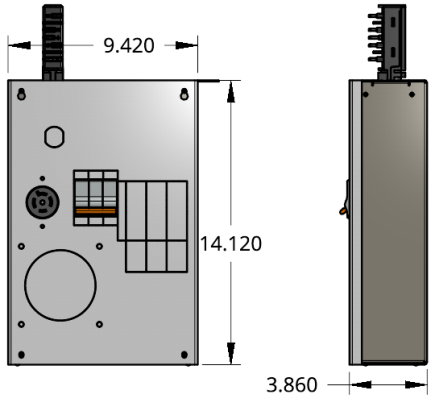

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L15-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-20R

20A, 250V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

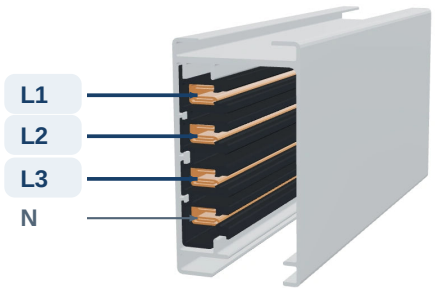

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L1520R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L1520R-G-T
Reverse: PT225-C-10-OB-L1520R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L15-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL1520R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

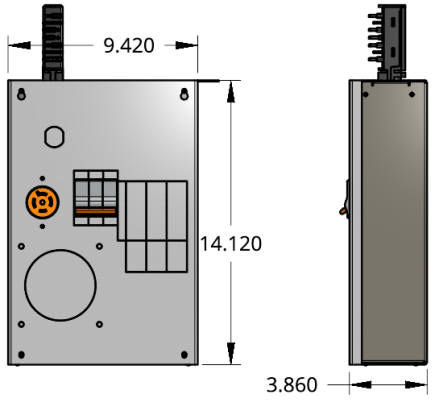

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L15-20R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-20R

20A, 250V AC device rating
Isolated equipment ground
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

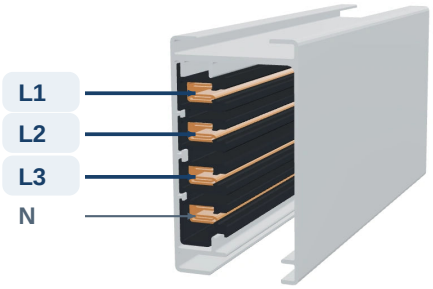

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-IGL1520R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL1520R-G-T
Reverse: PT225-C-10-OB-IGL1520R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L15-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L1520R-L1520R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

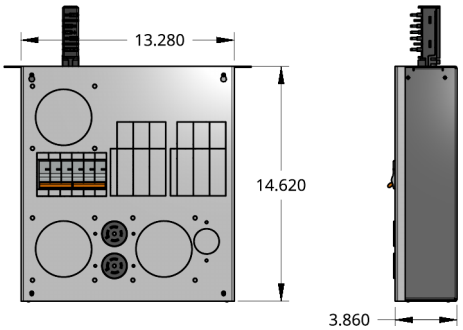

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L15-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-20R

20A, 250V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

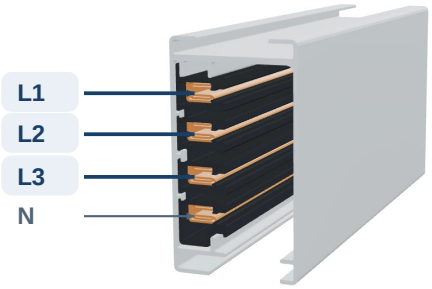

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L1520R-L1520R-G-T
Reverse: PT225-S-10-OB-L1520R-L1520R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L15-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL1520R-IGL1520R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

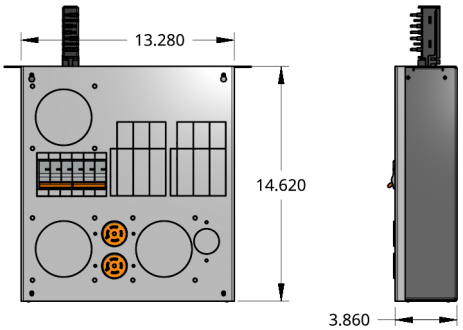

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L15-20R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-20R

20A, 250V AC device rating
Isolated equipment ground
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

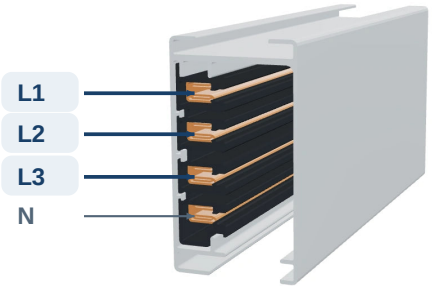

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL1520R-IGL1520R-G-T
Reverse: PT225-S-10-OB-IGL1520R-IGL1520R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x L16-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L1620R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

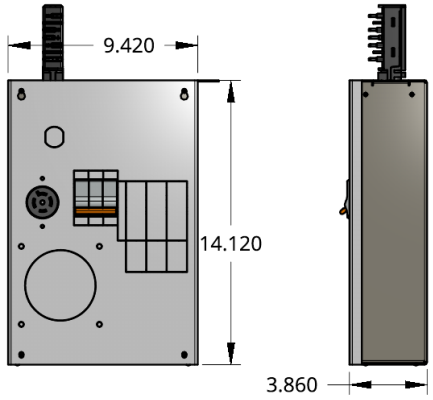

Enclosure views; connection detail at right

Supply	480V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L16-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L16-20R

20A, 480V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

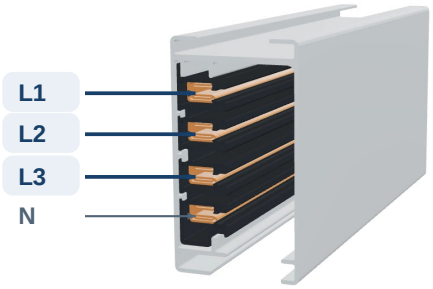

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L1620R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L1620R-G-T
Reverse: PT225-C-10-OB-L1620R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase per output / 2 x 3-pole / 2 x L16-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L1620R-L1620R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

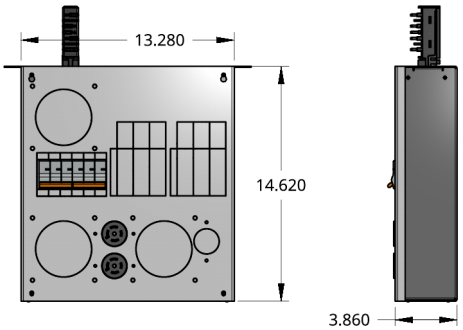

Enclosure views; connection detail at right

Supply	480V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L16-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L16-20R

20A, 480V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

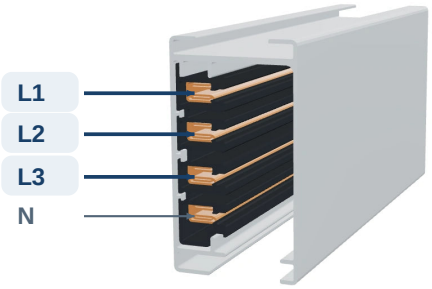

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L1620R-L1620R-G-T
Reverse: PT225-S-10-OB-L1620R-L1620R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L21-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L2120R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

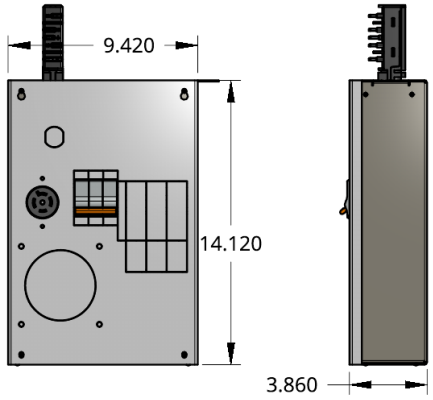

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L21-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L21-20R

20A, 120/208V AC device rating
Equipment ground included
Neutral included

Specify when ordering

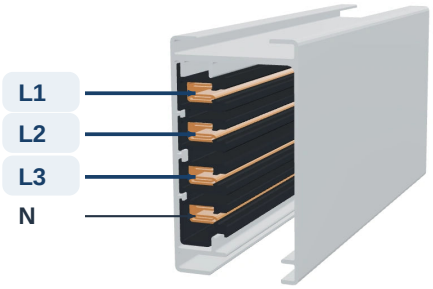

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L2120R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L2120R-G-T
Reverse: PT225-C-10-OB-L2120R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L21-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL2120R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

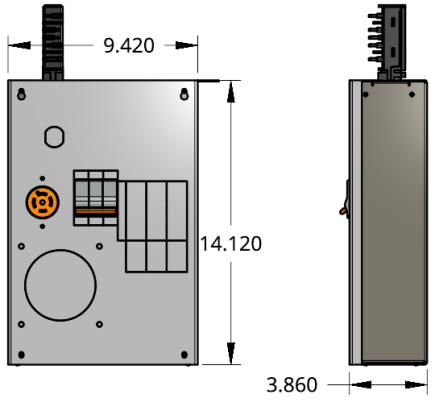

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L21-20R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L21-20R

20A, 120/208V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

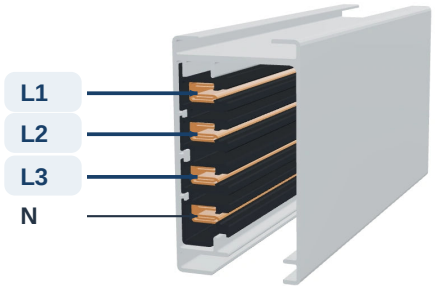

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-IGL2120R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL2120R-G-T
Reverse: PT225-C-10-OB-IGL2120R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L21-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L2120R-L2120R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

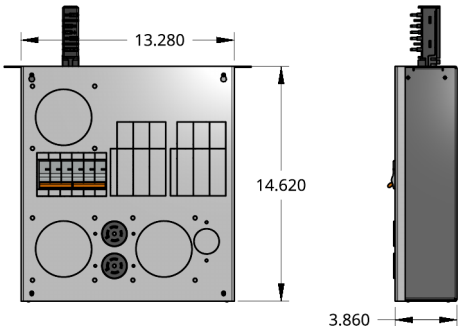

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L21-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L21-20R

20A, 120/208V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

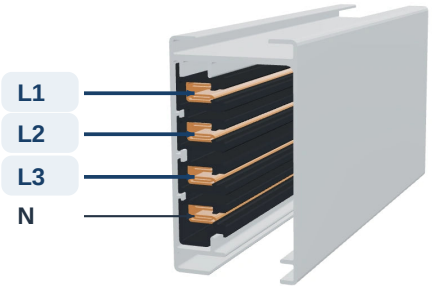

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L2120R-L2120R-G-T
Reverse: PT225-S-10-OB-L2120R-L2120R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L21-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL2120R-IGL2120R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

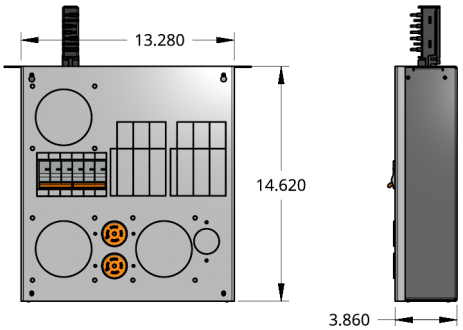

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L21-20R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L21-20R

20A, 120/208V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

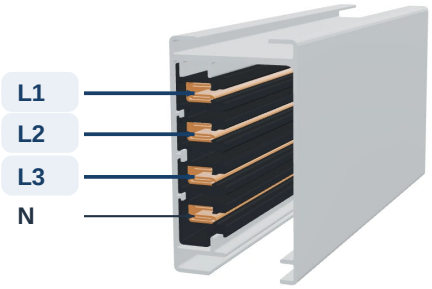

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL2120R-IGL2120R-G-T
Reverse: PT225-S-10-OB-IGL2120R-IGL2120R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x L22-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L2220R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

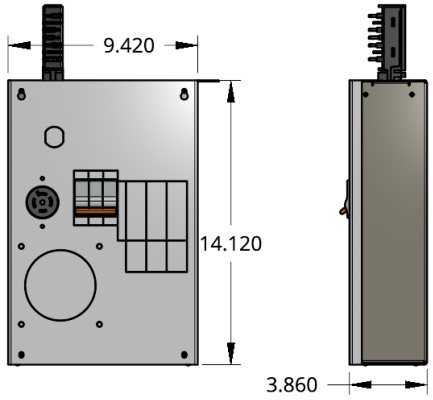

Enclosure views; connection detail at right

Supply	480V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L22-20R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L22-20R

20A, 277/480V AC device rating
Equipment ground included
Neutral included

Specify when ordering

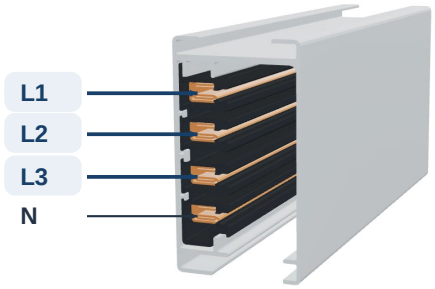

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L2220R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L2220R-G-T
Reverse: PT225-C-10-OB-L2220R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x L22-20R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL2220R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

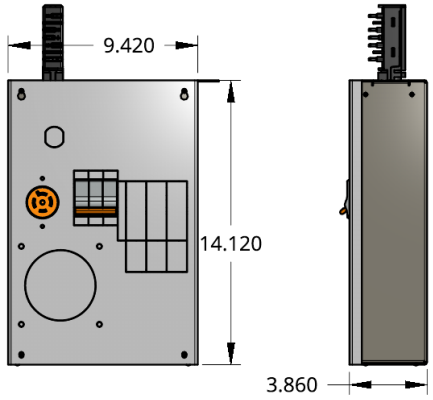

Enclosure views; connection detail at right

Supply	480V, three-phase
A Protection	1 x 20A, 3-pole breaker
B Output	1 x L22-20R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L22-20R

20A, 277/480V AC device rating
Isolated equipment ground
Neutral included

Specify when ordering

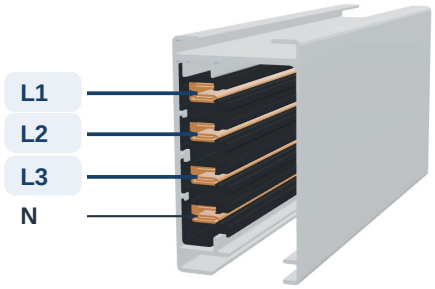

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-IGL2220R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL2220R-G-T
Reverse: PT225-C-10-OB-IGL2220R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase per output / 2 x 3-pole / 2 x L22-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L2220R-L2220R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

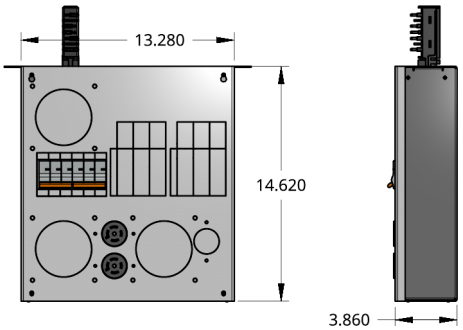

Enclosure views; connection detail at right

Supply	480V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L22-20R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L22-20R

20A, 277/480V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

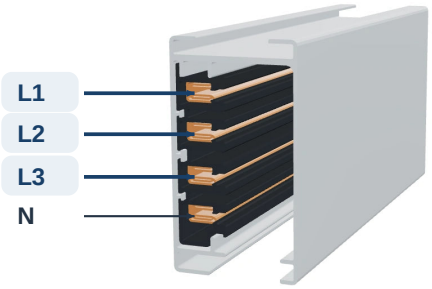

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L2220R-L2220R-G-T
Reverse: PT225-S-10-OB-L2220R-L2220R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 20A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase per output / 2 x 3-pole / 2 x L22-20R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL2220R-IGL2220R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

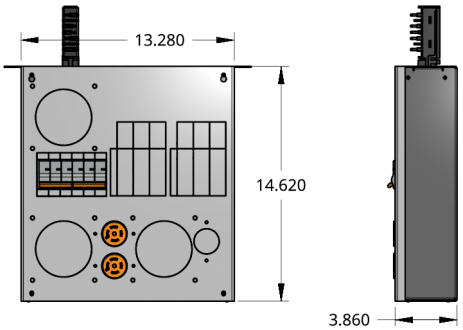

Enclosure views; connection detail at right

Supply	480V, three-phase per output
A Protection	2 x 20A, 3-pole breakers; one per output
B Output	2 x L22-20R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L22-20R

20A, 277/480V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

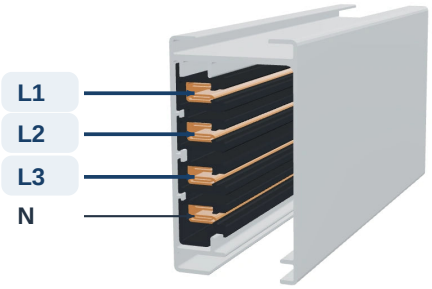

T225 conductor arrangement

2 independent circuits; one 20A, 3-pole breaker per output.

Receptacle 1
20A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
20A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL2220R-IGL2220R-G-T
Reverse: PT225-S-10-OB-IGL2220R-IGL2220R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L15-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L1530R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

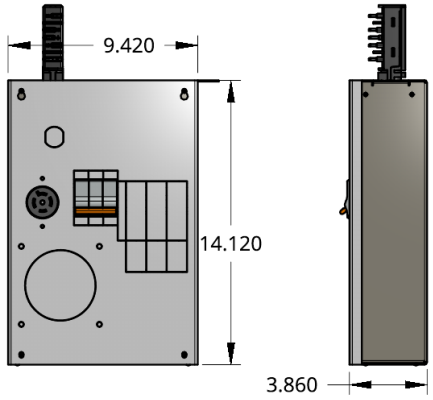

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L15-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-30R

30A, 250V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

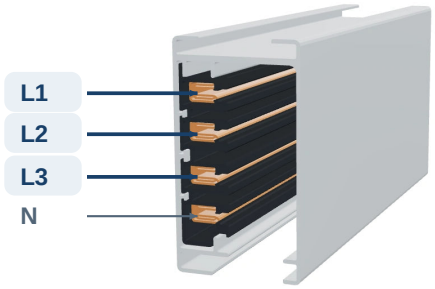

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L1530R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L1530R-G-T
Reverse: PT225-C-10-OB-L1530R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L15-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL1530R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

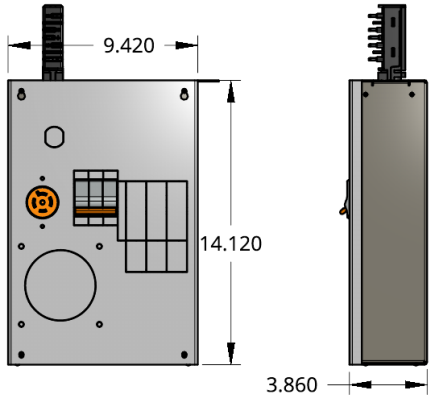

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L15-30R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-30R

30A, 250V AC device rating
Isolated equipment ground
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

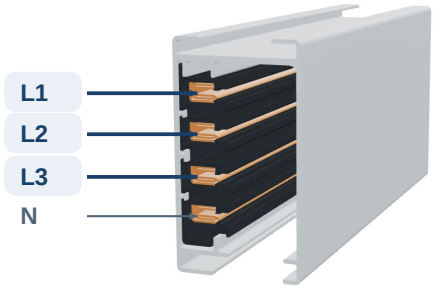

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-IGL1530R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL1530R-G-T
Reverse: PT225-C-10-OB-IGL1530R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L15-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L1530R-L1530R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

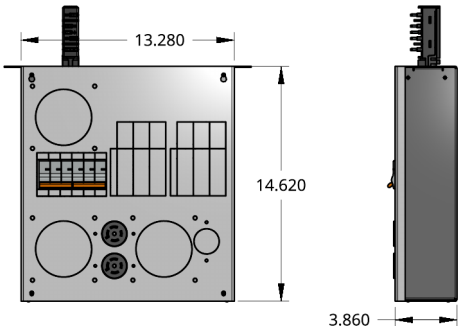

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L15-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-30R

30A, 250V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

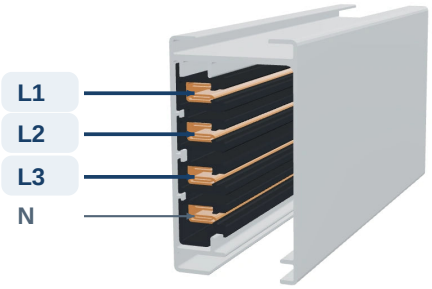

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L1530R-L1530R-G-T
Reverse: PT225-S-10-OB-L1530R-L1530R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L15-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL1530R-IGL1530R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

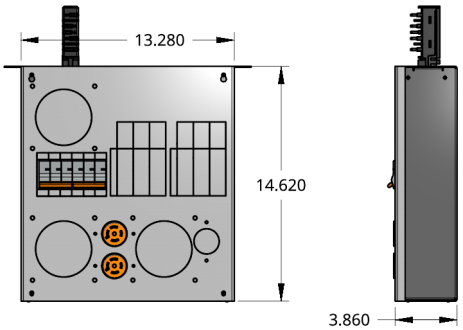

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L15-30R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L15-30R

30A, 250V AC device rating
Isolated equipment ground
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

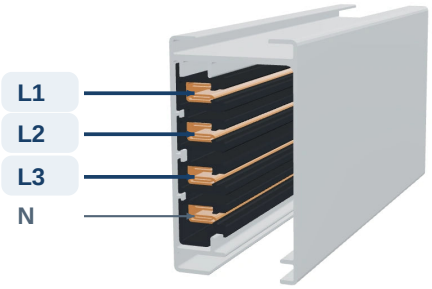

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL1530R-IGL1530R-G-T
Reverse: PT225-S-10-OB-IGL1530R-IGL1530R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x L16-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L1630R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

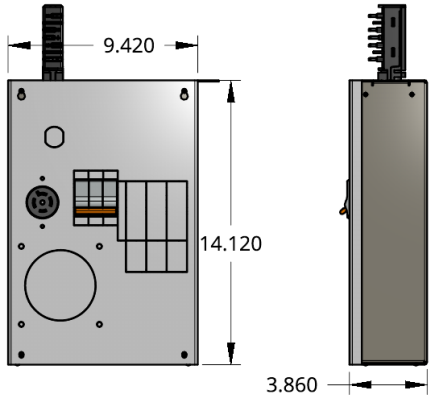

Enclosure views; connection detail at right

Supply	480V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L16-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L16-30R

30A, 480V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

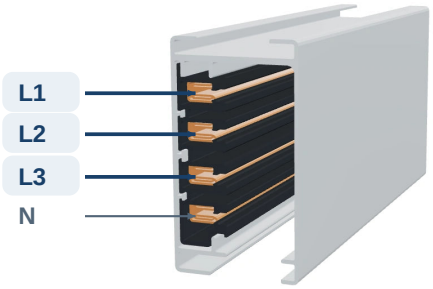

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L1630R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L1630R-G-T
Reverse: PT225-C-10-OB-L1630R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase per output / 2 x 3-pole / 2 x L16-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L1630R-L1630R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION

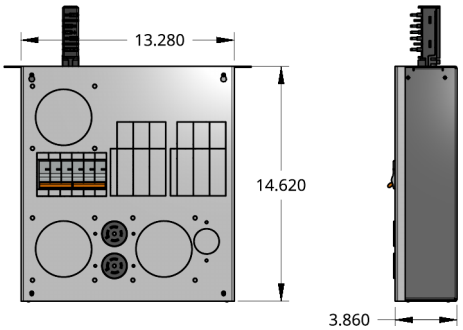

Enclosure views; connection detail at right

Supply	480V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L16-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L16-30R

30A, 480V AC device rating
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

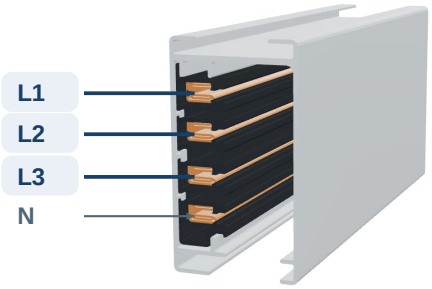

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L1630R-L1630R-G-T
Reverse: PT225-S-10-OB-L1630R-L1630R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L21-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L2130R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

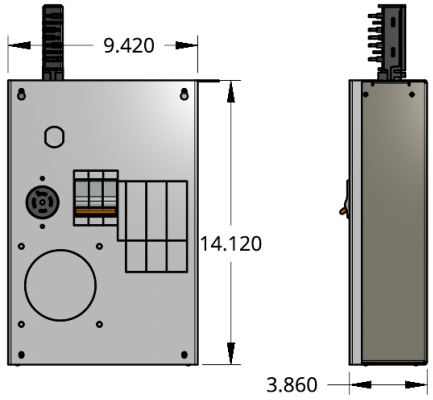

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L21-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L21-30R

30A, 120/208V AC device rating
Equipment ground included
Neutral included

Specify when ordering

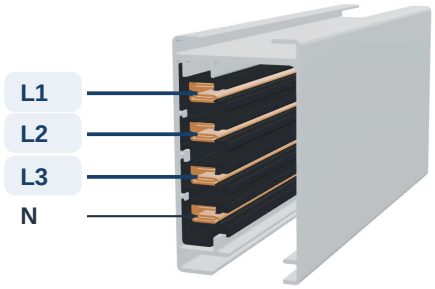

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L2130R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L2130R-G-T
Reverse: PT225-C-10-OB-L2130R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x L21-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL2130R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

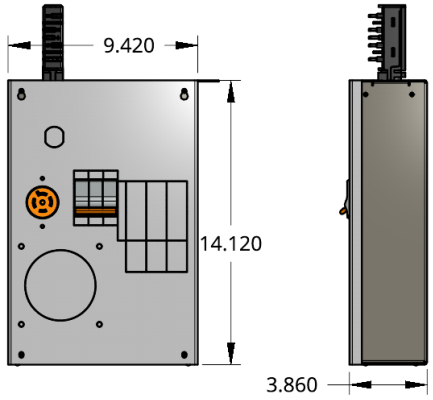

Enclosure views; connection detail at right

Supply	208V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L21-30R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L21-30R

30A, 120/208V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

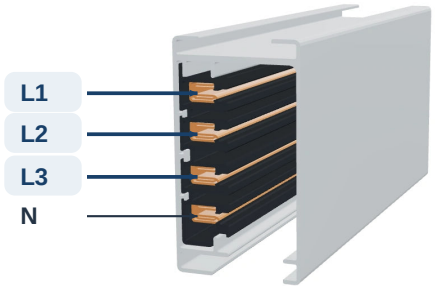

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-IGL2130R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL2130R-G-T
Reverse: PT225-C-10-OB-IGL2130R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L21-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L2130R-L2130R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

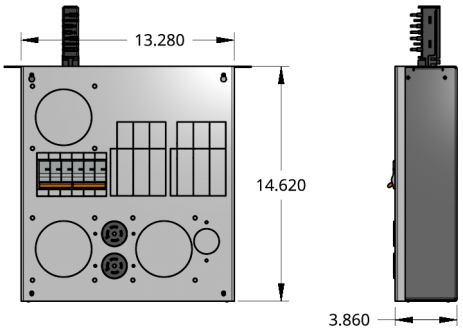

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L21-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L21-30R

30A, 120/208V AC device rating
Equipment ground included
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

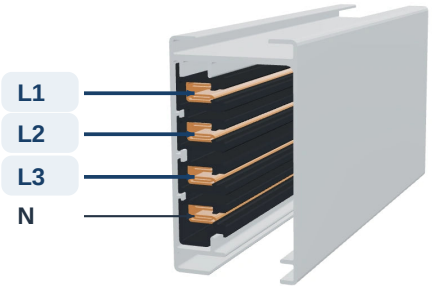

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L2130R-L2130R-G-T
Reverse: PT225-S-10-OB-L2130R-L2130R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase per output / 2 x 3-pole / 2 x L21-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL2130R-IGL2130R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

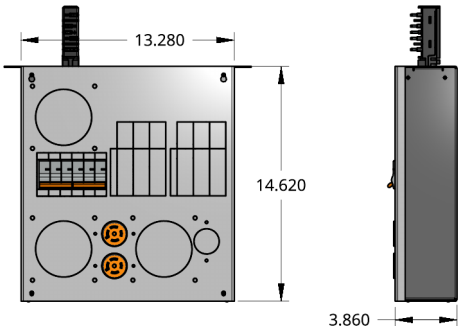

Enclosure views; connection detail at right

Supply	208V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L21-30R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L21-30R

30A, 120/208V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

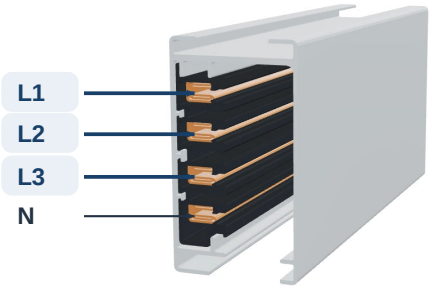

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL2130R-IGL2130R-G-T
Reverse: PT225-S-10-OB-IGL2130R-IGL2130R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x L22-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-L2230R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

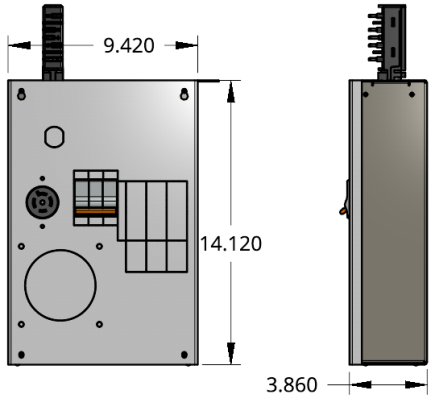

Enclosure views; connection detail at right

Supply	480V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L22-30R receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L22-30R

30A, 277/480V AC device rating
Equipment ground included
Neutral included

Specify when ordering

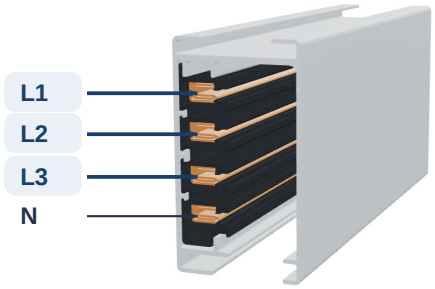

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-L2230R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-L2230R-G-T
Reverse: PT225-C-10-OB-L2230R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x L22-30R receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-C-10-OB-IGL2230R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

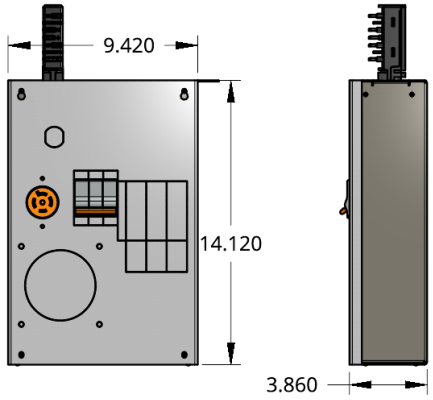

Enclosure views; connection detail at right

Supply	480V, three-phase
A Protection	1 x 30A, 3-pole breaker
B Output	1 x L22-30R receptacle
Grounding	Isolated ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L22-30R

30A, 277/480V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

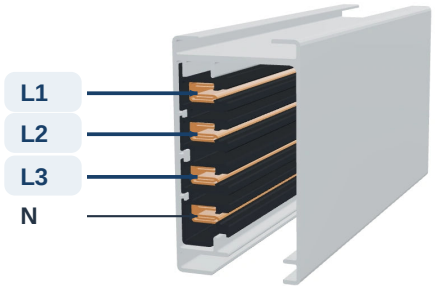

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-IGL2230R-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-IGL2230R-G-T
Reverse: PT225-C-10-OB-IGL2230R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase per output / 2 x 3-pole / 2 x L22-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-L2230R-L2230R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

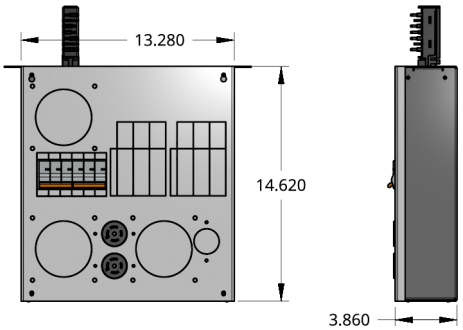

Enclosure views; connection detail at right

Supply	480V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L22-30R receptacles
Grounding	Standard equipment ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



L22-30R

30A, 277/480V AC device rating
Equipment ground included
Neutral included

Phase connection / specify when ordering

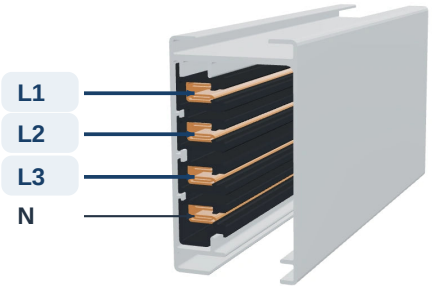

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-L2230R-L2230R-G-T
Reverse: PT225-S-10-OB-L2230R-L2230R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 30A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase per output / 2 x 3-pole / 2 x L22-30R receptacles

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS


PT225-S-10-OB-IGL2230R-IGL2230R-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
L1 + L2 + L3 (fixed)

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION

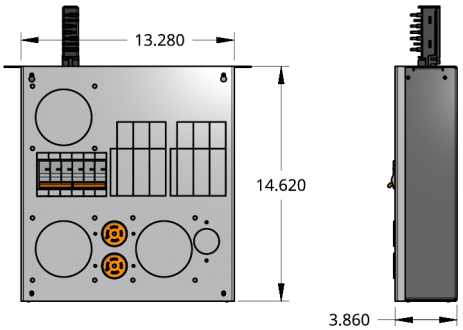

Enclosure views; connection detail at right

Supply	480V, three-phase per output
A Protection	2 x 30A, 3-pole breakers; one per output
B Output	2 x L22-30R receptacles
Grounding	Isolated ground
Enclosure	Standard S
Body W x H x D	13.280 x 14.620 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




L22-30R

30A, 277/480V AC device rating
Isolated equipment ground
Neutral included

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Phase connection / specify when ordering

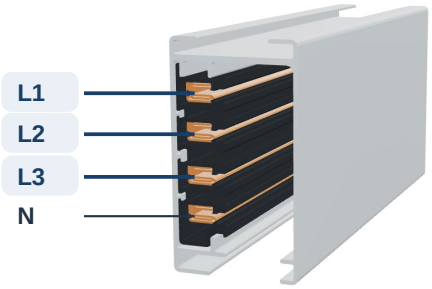

T225 conductor arrangement

2 independent circuits; one 30A, 3-pole breaker per output.

Receptacle 1
30A / 3-pole breaker
L1 + L2 + L3 + N


Receptacle 2
30A / 3-pole breaker
L1 + L2 + L3 + N

PHASE CONNECTION = L1L2L3 (fixed)
Each output uses all three phases. No phase entry is required.

Each output uses all three phases through its own 3-pole breaker. Equipment ground is retained; neutral is included where specified.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING FORMAT / specify phase connection, factory orientation and any required cord length
Typical: PT225-S-10-OB-IGL2230R-IGL2230R-G-T
Reverse: PT225-S-10-OB-IGL2230R-IGL2230R-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL8450A | 208V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-1550R-CB50-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

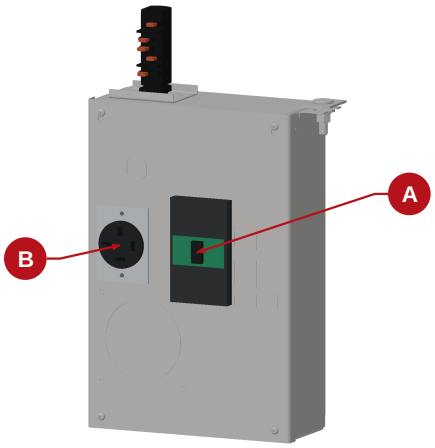

REPRESENTATIVE C-10 ASSEMBLY

GLB enclosure; illustrative device locations.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36050

50A / 3-pole

B MOUNTED RECEPTACLE




HBL8450A

Female output

Assembly rating	50A, 208V, 3-phase
A Circuit breaker	Schneider BGL36050 / 50A, 3-pole
B Output	HBL8450A / Mounted female receptacle
Device rating	50A, 250V, 3-phase
Conductors	L1 + L2 + L3 + G
Matching plug	HBL8452C (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

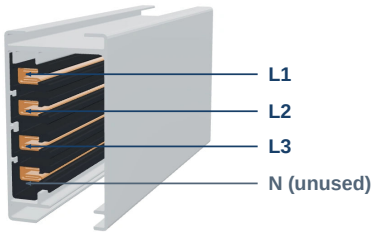

G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + G

All three phases connect through the 3-pole breaker. Neutral is not connected to this output. Equipment ground is included.

Ordering example: PT225-C-10-OB-1550R-CB50-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-1550R-CB50-G-T
Reverse: PT225-C-10-OB-1550R-CB50-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™ 50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL460R7W | 480V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-460R7W-CB50-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

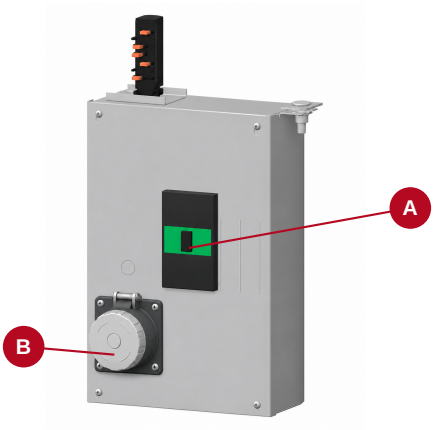

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36050

50A / 3-pole

B MOUNTED RECEPTACLE




HBL460R7W

Female output

Assembly rating	50A, 480V, 3-phase
A Circuit breaker	Schneider BGL36050 / 50A, 3-pole
B Output	HBL460R7W / Mounted female receptacle
Device rating	60A, 480V, 3-phase; 4 contacts / 7h
Conductors	L1 + L2 + L3 + G
Matching plug	HBL460P7W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

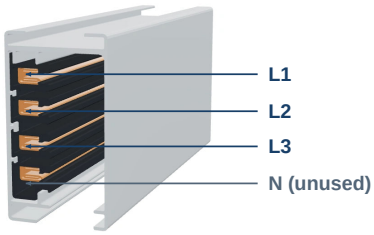

G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + G

All three phases connect through the 3-pole breaker. Neutral is not connected to this output. Equipment ground is included.

Ordering example: PT225-C-10-OB-460R7W-CB50-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-460R7W-CB50-G-T
Reverse: PT225-C-10-OB-460R7W-CB50-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™
50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL460R9W | 208V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-460R9W-CB50-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

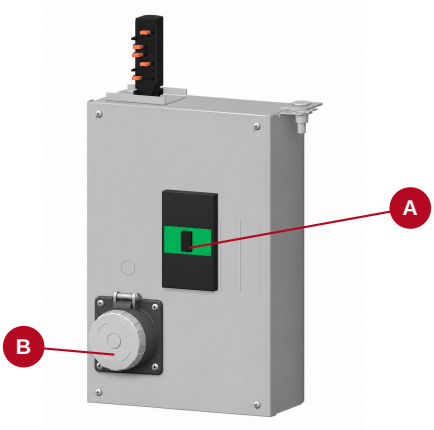

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36050

50A / 3-pole

B MOUNTED RECEPTACLE




HBL460R9W

Female output

Assembly rating	50A, 208V, 3-phase
A Circuit breaker	Schneider BGL36050 / 50A, 3-pole
B Output	HBL460R9W / Mounted female receptacle
Device rating	60A, 250V, 3-phase; 4 contacts / 9h
Conductors	L1 + L2 + L3 + G
Matching plug	HBL460P9W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

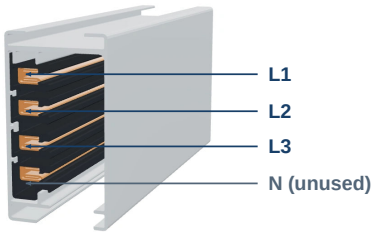

G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + G

All three phases connect through the 3-pole breaker. Neutral is not connected to this output. Equipment ground is included.

Ordering example: PT225-C-10-OB-460R9W-CB50-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-460R9W-CB50-G-T
Reverse: PT225-C-10-OB-460R9W-CB50-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™ 50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL560R7W | 480Y/277V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-560R7W-CB50-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

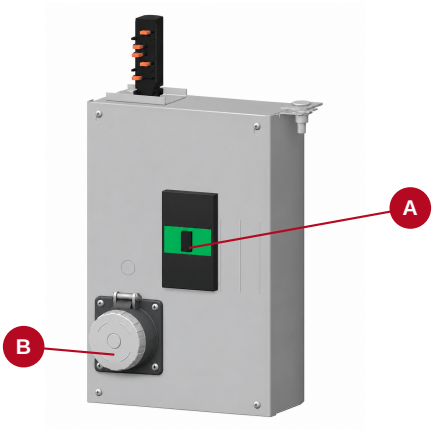

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36050

50A / 3-pole

B MOUNTED RECEPTACLE




HBL560R7W

Female output

Assembly rating	50A, 480Y/277V, 3-phase
A Circuit breaker	Schneider BGL36050 / 50A, 3-pole
B Output	HBL560R7W / Mounted female receptacle
Device rating	60A, 277/480V; 5 contacts / 7h
Conductors	L1 + L2 + L3 + N + G
Matching plug	HBL560P7W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering



G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + N + G

All three phases connect through the 3-pole breaker. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-560R7W-CB50-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-560R7W-CB50-G-T
Reverse: PT225-C-10-OB-560R7W-CB50-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™ 50A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL560R9W | 208Y/120V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-560R9W-CB50-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

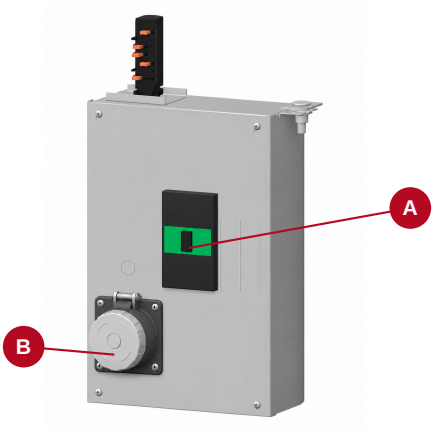

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36050

50A / 3-pole

B MOUNTED RECEPTACLE




HBL560R9W

Female output

Assembly rating	50A, 208Y/120V, 3-phase
A Circuit breaker	Schneider BGL36050 / 50A, 3-pole
B Output	HBL560R9W / Mounted female receptacle
Device rating	60A, 120/208V; 5 contacts / 9h
Conductors	L1 + L2 + L3 + N + G
Matching plug	HBL560P9W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering



G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + N + G

All three phases connect through the 3-pole breaker. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-560R9W-CB50-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-560R9W-CB50-G-T
Reverse: PT225-C-10-OB-560R9W-CB50-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™ 60A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x 460R7W receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS

PT225-C-10-OB-460R7W-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION



Representative assembly
Body dimensions shown in table.

Supply	480V, three-phase
A Protection	1 x 60A, 3-pole MCB
B Output	1 x 460R7W receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




460R7W

60A, 480V AC device rating
4 contacts / 7h
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

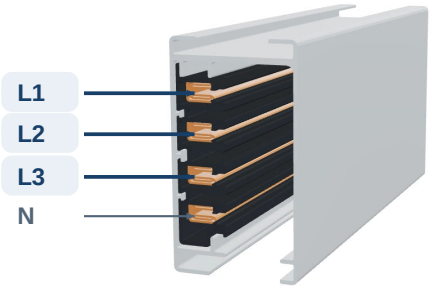

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-460R7W-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-460R7W-G-T
Reverse: PT225-C-10-OB-460R7W-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 60A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x 460R9W receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS

PT225-C-10-OB-460R9W-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R


YOUR TAP-OFF CONFIGURATION



Representative assembly
Body dimensions shown in table.

Supply	208V, three-phase
A Protection	1 x 60A, 3-pole MCB
B Output	1 x 460R9W receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

B OUTLET RECEPTACLE




460R9W

60A, 250V AC device rating
4 contacts / 9h
Equipment ground included
No neutral contact

trackbusway.com/products/t225-3-pole-breakered-outlet-box

Specify when ordering

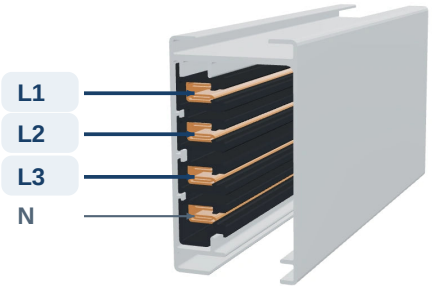

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3**; **no neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-460R9W-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-460R9W-G-T
Reverse: PT225-C-10-OB-460R9W-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 60A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

480V, three-phase / 1 x 3-pole / 1 x 560R7W receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS

PT225-C-10-OB-560R7W-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION




Representative assembly
Body dimensions shown in table.

Supply	480V, three-phase
A Protection	1 x 60A, 3-pole MCB
B Output	1 x 560R7W receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



560R7W

60A, 277/480V AC device rating
5 contacts / 7h
Equipment ground included
Neutral included

Specify when ordering

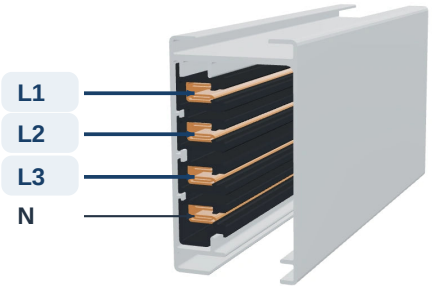

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-560R7W-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-560R7W-G-T
Reverse: PT225-C-10-OB-560R7W-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™ 60A Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

208V, three-phase / 1 x 3-pole / 1 x 560R9W receptacle

CATALOGUE NUMBER / FIXED CONFIGURATION + YOUR ORDER SELECTIONS

PT225-C-10-OB-560R9W-G-[T/R]

Base configuration
Unit + receptacle shown below

Phase connection
All three phases

Factory orientation
Choose -T or -R

YOUR TAP-OFF CONFIGURATION



Representative assembly
Body dimensions shown in table.

Supply	208V, three-phase
A Protection	1 x 60A, 3-pole MCB
B Output	1 x 560R9W receptacle
Grounding	Standard equipment ground
Enclosure	Compact C
Body W x H x D	9.420 x 14.120 x 3.860 in.
Required SCCR	Specify with order; subject to factory confirmation
Power monitoring	None

trackbusway.com/products/t225-3-pole-breakered-outlet-box


B OUTLET RECEPTACLE



560R9W

60A, 120/208V AC device rating
5 contacts / 9h
Equipment ground included
Neutral included

Specify when ordering

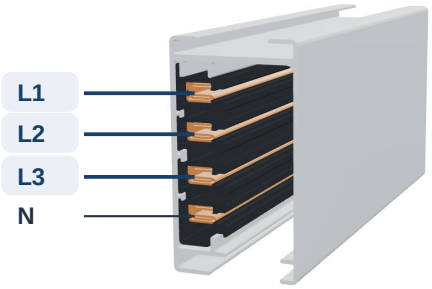

T225 conductor arrangement

This **3-pole** unit uses **L1 + L2 + L3** and **neutral**.

L1	L2	L3
Connected	Connected	Connected


FIXED: L1L2L3 / no phase entry required

PT225-C-10-OB-560R9W-G-[T/R]

All three phases are fixed for this configuration. No phase suffix is added. Equipment ground remains part of the circuit.

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

ORDERING EXAMPLES / select connection, orientation and any required cord length
Typical: PT225-C-10-OB-560R9W-G-T
Reverse: PT225-C-10-OB-560R9W-G-R

Certification reference - covered PT225 factory configurations. Intertek 5011082; Report 106508638CRT-001.

Illustrations not to scale. Body dimensions exclude projections and cord.

USA TrackBusway™
100A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL4100R7W | 480V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-4100R7W-CB100-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

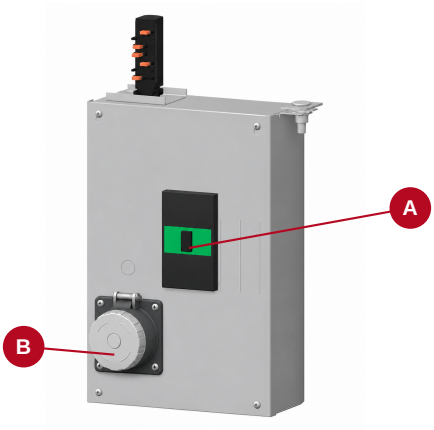

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36100

100A / 3-pole

B MOUNTED RECEPTACLE




HBL4100R7W

Female output

Assembly rating	100A, 480V, 3-phase
A Circuit breaker	Schneider BGL36100 / 100A, 3-pole
B Output	HBL4100R7W / Mounted female receptacle
Device rating	100A, 480V, 3-phase; 4 contacts / 7h
Conductors	L1 + L2 + L3 + G
Matching plug	HBL4100P7W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

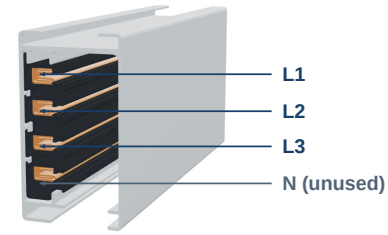

G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + G

All three phases connect through the 3-pole breaker. Neutral is not connected to this output. Equipment ground is included.

Ordering example: PT225-C-10-OB-4100R7W-CB100-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-4100R7W-CB100-G-T
Reverse: PT225-C-10-OB-4100R7W-CB100-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™
100A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL4100R9W | 208V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-4100R9W-CB100-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

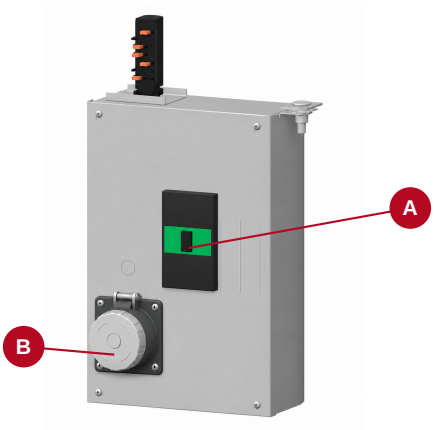

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36100

100A / 3-pole

B MOUNTED RECEPTACLE




HBL4100R9W

Female output

Assembly rating	100A, 208V, 3-phase
A Circuit breaker	Schneider BGL36100 / 100A, 3-pole
B Output	HBL4100R9W / Mounted female receptacle
Device rating	100A, 250V, 3-phase; 4 contacts / 9h
Conductors	L1 + L2 + L3 + G
Matching plug	HBL4100P9W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering

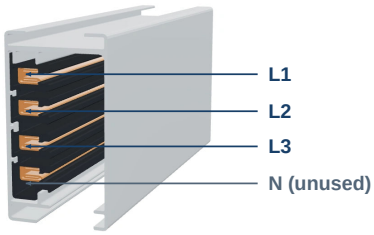

G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + G

All three phases connect through the 3-pole breaker. Neutral is not connected to this output. Equipment ground is included.

Ordering example: PT225-C-10-OB-4100R9W-CB100-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-4100R9W-CB100-G-T
Reverse: PT225-C-10-OB-4100R9W-CB100-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™
100A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL5100R7W | 480Y/277V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-5100R7W-CB100-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

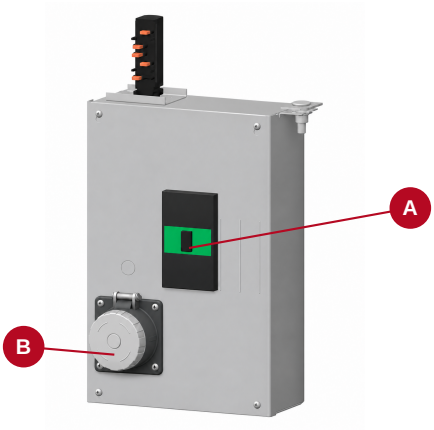

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36100

100A / 3-pole

B MOUNTED RECEPTACLE




HBL5100R7W

Female output

Assembly rating	100A, 480Y/277V, 3-phase
A Circuit breaker	Schneider BGL36100 / 100A, 3-pole
B Output	HBL5100R7W / Mounted female receptacle
Device rating	100A, 277/480V; 5 contacts / 7h
Conductors	L1 + L2 + L3 + N + G
Matching plug	HBL5100P7W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering



G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + N + G

All three phases connect through the 3-pole breaker. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-5100R7W-CB100-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-5100R7W-CB100-G-T
Reverse: PT225-C-10-OB-5100R7W-CB100-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.

USA TrackBusway™
100A T225 Outlet Box

ETL Listed to UL 857 Busway Standards
by Intertek

Built in the United States

HBL5100R9W | 208Y/120V, 3-phase | 3-pole circuit breaker

CATALOGUE NUMBER / FACTORY ORDER SELECTIONS


PT225-C-10-OB-5100R9W-CB100-G-[T/R]

One mounted female receptacle

Standard equipment ground | No power monitoring

YOUR TAP-OFF CONFIGURATION

trackbusway.com/products/t225-3-pole-breakered-outlet-box

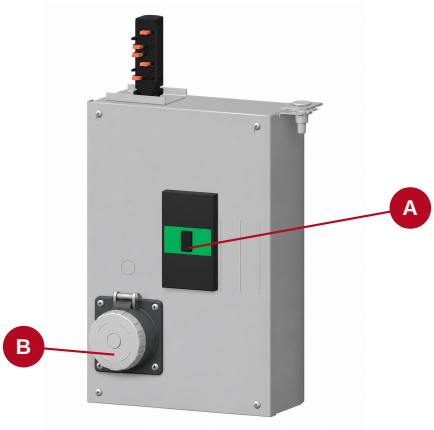

REPRESENTATIVE C-10 ASSEMBLY

Illustrative assembly; device color varies.
A/B identify the specified components.

SPECIFIED COMPONENTS

A CIRCUIT BREAKER



Schneider BGL36100

100A / 3-pole

B MOUNTED RECEPTACLE




HBL5100R9W

Female output

Assembly rating	100A, 208Y/120V, 3-phase
A Circuit breaker	Schneider BGL36100 / 100A, 3-pole
B Output	HBL5100R9W / Mounted female receptacle
Device rating	100A, 120/208V; 5 contacts / 9h
Conductors	L1 + L2 + L3 + N + G
Matching plug	HBL5100P9W (equipment side)
Enclosure	Compact C-10 / 9.420 W x 14.120 H x 3.860 D in.
Required SCCR	Specify with order; factory assembly rating controls

Specify when ordering



G: bonded housing

PHASE CONNECTION: L1L2L3 (no phase entry)


L1 + L2 + L3 + N + G

All three phases connect through the 3-pole breaker. Neutral connects to the output; it is not a breaker pole. Equipment ground is included.

Ordering example: PT225-C-10-OB-5100R9W-CB100-G-[T/R]

CHOOSE THE FACTORY BREAKER ORIENTATION

Both views below show the breaker facing left. Enclosures continue below the break lines.




-T TYPICAL

CONDUCTORS / INSULATOR
LEFT side

BREAKER FACES LEFT

SAME SIDE
as the conductors



-R REVERSE

CONDUCTORS / INSULATOR
RIGHT side

BREAKER FACES LEFT

OPPOSITE SIDE
as the conductors

FACTORY-SET. NOT FIELD-ROTATABLE. Select -T or -R when ordering.

Typical: PT225-C-10-OB-5100R9W-CB100-G-T
Reverse: PT225-C-10-OB-5100R9W-CB100-G-R

PT225 family reference: Intertek 5011082; Report 106508638CRT-001. Applicable ETL identification and assembly ratings follow the factory unit label.

Body dimensions exclude projections and cord. Equipment plug supplied with customer equipment.