

# 225A Track Busway

## 1-Pole Breakered Outlet Box


Shopify SKU: T225-C-10-OB-L515-G

Shopify variant ID: 43984836657239

SELECTED CONFIGURATION - PRODUCT DATA

|                      |                                                                   |
|----------------------|-------------------------------------------------------------------|
| Ordered supply       | 120V 1-Phase (1PNG)                                               |
| Breaker protection   | 1 x 1-pole breaker; Selected branch current: 15A                  |
| Outputs              | 1 twist lock receptacle; L5-15R                                   |
| NEMA device rating   | 15A, 125V; 2 device poles, 3 wires including ground               |
| Device contact roles | Line + neutral + equipment ground                                 |
| Grounding            | Standard ground                                                   |
| CPM                  | None (No CPM)                                                     |
| Enclosure            | Compact C-10                                                      |
| Body dimensions      | 9.420 W x 14.120 H x 3.860 D in. Body only; excludes projections. |

ENCLOSURE DRAWING

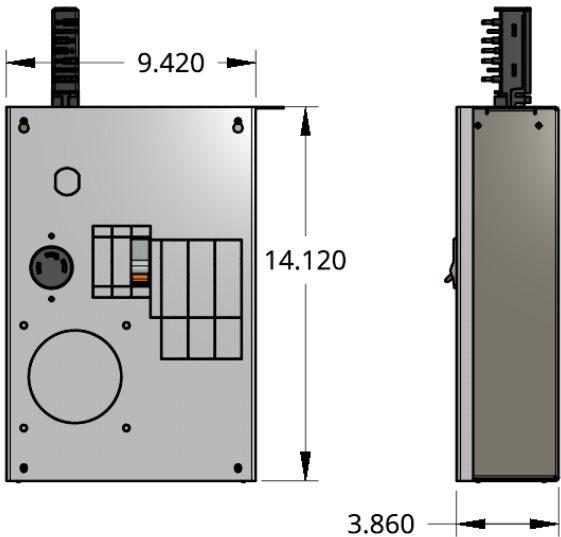

T225-C-10-OB-L520R-G

REPRESENTATIVE ENCLOSURE. Pictured catalog: T225-C-10-OB-L520R-G. Pictured L5-20R differs from selected L5-15R. Refer to the table and exact selected face for device rating and grounding. Not to scale.

SELECTED RECEPTACLE REFERENCE



L5-15R

NEMA L5-15R; 15A; 125V. Selected quantity: 1; Standard ground. Female interface reference only, not a finished assembly. Source: Hubbell chart, p. V.

# T225 1-pole outlet-box | phase selection update

Order number = listed base SKU + selected phase suffix. The phase is recorded with the order.

## Connection and suffix choices

| Phase assignment | Order suffix | Example full order SKU |
|------------------|--------------|------------------------|
| L1 to neutral    | -L1          | T225-C-10-OB-L515-G-L1 |
| L2 to neutral    | -L2          | T225-C-10-OB-L515-G-L2 |
| L3 to neutral    | -L3          | T225-C-10-OB-L515-G-L3 |

## Selection guidance

These suffixes apply to the listed 120V and 277V one-pole configurations.  
Choose the actual phase at checkout; the base SKU alone does not record it.  
Branch voltage, interface, grounding and enclosure still follow the selected base build.  
A NEMA R designation names the female interface, including a cord connector body.  
The OB or DCXX portion of the T225 base SKU identifies box or drop-cord style.

This page supplements the family guide. Device and complete-assembly ratings remain subject to the selected build and its marked unit; confirm feeder and phase loading.