

# 225A Track Busway

## 2-Pole Breakered Outlet Box


Shopify SKU: T225-C-10-OB-L630-G

Shopify variant ID: 42712674533463  
USA TrackBusway catalog / part no.: T225-C-10-OB-L630R-G

SELECTED CONFIGURATION - PRODUCT DATA

|                      |                                                                   |
|----------------------|-------------------------------------------------------------------|
| Ordered supply       | 208V line-to-line (2PG); no neutral                               |
| Breaker protection   | 1 x 2-pole breaker; Selected branch current: 30A                  |
| Outputs              | 1 receptacle; L6-30R                                              |
| NEMA device rating   | 30A, 250V; 2 device poles, 3 wires including ground               |
| Device contact roles | Two lines + equipment ground; no neutral                          |
| Grounding            | Standard ground                                                   |
| CPM                  | None (No CPM)                                                     |
| Enclosure            | Compact C-10                                                      |
| Body dimensions      | 9.420 W x 14.120 H x 3.860 D in. Body only; excludes projections. |


ENCLOSURE DRAWING

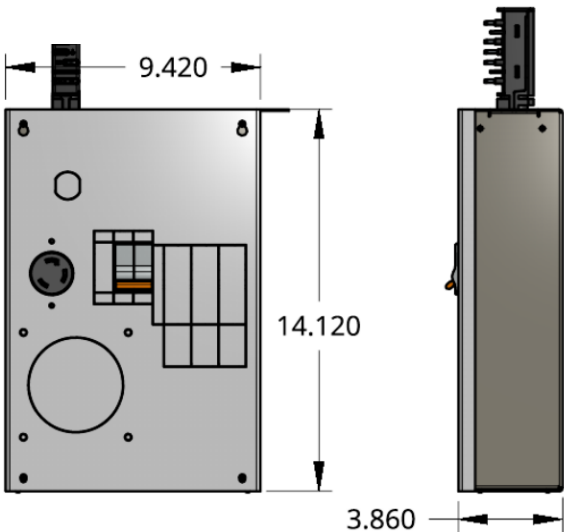

T225-C-10-OB-L630R-G

Exact enclosure configuration. Drawing catalog: T225-C-10-OB-L630R-G. Printed R-suffixed catalog notation corresponds to the Shopify SKU shown. Not to scale.

SELECTED RECEPTACLE REFERENCE



L6-30R

NEMA L6-30R; 30A; 250V. Selected quantity: 1; Standard ground. Female interface reference only, not a finished assembly. Source: Hubbell chart, p. V.

# T225 2-pole outlet-box | phase selection update

Order number = listed base SKU + selected phase suffix. The phase is recorded with the order.

## Connection and suffix choices

| Phase assignment | Order suffix | Example full order SKU   |
|------------------|--------------|--------------------------|
| L1 + L2          | -L1L2        | T225-C-10-OB-L630-G-L1L2 |
| L2 + L3          | -L2L3        | T225-C-10-OB-L630-G-L2L3 |
| L1 + L3          | -L1L3        | T225-C-10-OB-L630-G-L1L3 |

## Selection guidance

The 208V L6-30R build connects two lines and equipment ground; it does not use neutral. The same outlet interface is selected once for an applicable 208Y/120V or 208V delta busway source. Confirm the system rating and tap compatibility for the actual source. An L14 receptacle has a neutral contact and remains a distinct configuration. L14-30R is a NEMA female interface; standard and isolated-ground devices exist. Choose grounding and physical mounting style for the complete factory tap-off. A NEMA R designation names the female interface, including a cord connector body. The OB or DCXX portion of the T225 base SKU identifies box or drop-cord style.

This page supplements the family guide. Device and complete-assembly ratings remain subject to the selected build and its marked unit; confirm feeder and phase loading.