

225A Track Busway

1-Pole Breakered Outlet Box


Shopify SKU: T225-S-10-OB-IGL530-IGL530-G

Shopify variant ID: 43984837935191
USA TrackBusway catalog / part no.: T225-S-10-OB-IGL530R-IGL530R-G

SELECTED CONFIGURATION - PRODUCT DATA

Ordered supply	120V 1-Phase (1PNG)
Breaker protection	2 x 1-pole breakers; Selected branch current: 30A
Outputs	2 twist lock receptacles; L5-30R
NEMA device rating	30A, 125V; 2 device poles, 3 wires including ground
Device contact roles	Line + neutral + equipment ground
Grounding	Isolated ground
CPM	None (No CPM)
Enclosure	Standard S-10
Body dimensions	13.280 W x 14.620 H x 3.860 D in. Body only; excludes projections.

ENCLOSURE DRAWING

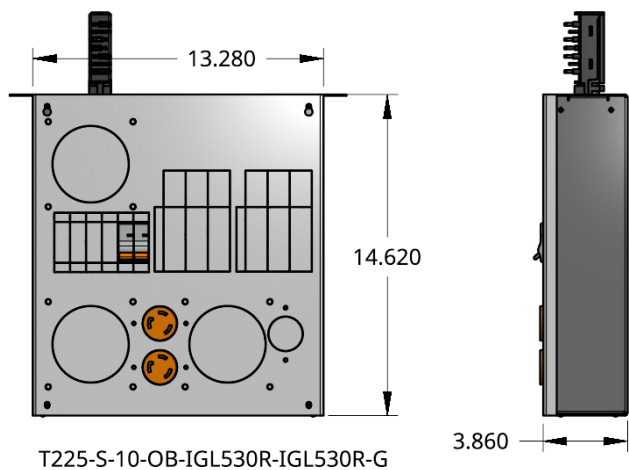

Exact enclosure configuration. Drawing catalog: T225-S-10-OB-IGL530R-IGL530R-G. Printed R-suffixed catalog notation corresponds to the Shopify SKU shown. Not to scale.

SELECTED RECEPTACLE REFERENCE



NEMA L5-30R; 30A; 125V. Selected quantity: 2; Isolated ground. Female interface reference only, not a finished assembly. Source: Hubbell chart, p. V.

T225 1-pole outlet-box | phase selection update

Order number = listed base SKU + selected phase suffix. The phase is recorded with the order.

Connection and suffix choices

Phase assignment	Order suffix	Example full order SKU
L1 to neutral	-L1	T225-S-10-OB-IGL530-IGL530-G-L1
L2 to neutral	-L2	T225-S-10-OB-IGL530-IGL530-G-L2
L3 to neutral	-L3	T225-S-10-OB-IGL530-IGL530-G-L3

Selection guidance

These suffixes apply to the listed 120V and 277V one-pole configurations.
Choose the actual phase at checkout; the base SKU alone does not record it.
Branch voltage, interface, grounding and enclosure still follow the selected base build.
A NEMA R designation names the female interface, including a cord connector body.
The OB or DCXX portion of the T225 base SKU identifies box or drop-cord style.

This page supplements the family guide. Device and complete-assembly ratings remain subject to the selected build and its marked unit; confirm feeder and phase loading.