

# 225A Track Busway

## 2-Pole Breakered Outlet Box


Shopify SKU: T225-S-10-OB-IGL620-IGL620-G

Shopify variant ID: 42741715894359  
USA TrackBusway catalog / part no.: T225-S-10-OB-IGL620R-IGL620R-G

SELECTED CONFIGURATION - PRODUCT DATA

|                      |                                                                    |
|----------------------|--------------------------------------------------------------------|
| Ordered supply       | 208V line-to-line (2PG); no neutral                                |
| Breaker protection   | 2 x 2-pole breakers; Selected branch current: 20A                  |
| Outputs              | 2 receptacles; L6-20R                                              |
| NEMA device rating   | 20A, 250V; 2 device poles, 3 wires including ground                |
| Device contact roles | Two lines + equipment ground; no neutral                           |
| Grounding            | Isolated ground                                                    |
| CPM                  | None (No CPM)                                                      |
| Enclosure            | Standard S-10                                                      |
| Body dimensions      | 13.280 W x 14.620 H x 3.860 D in. Body only; excludes projections. |

ENCLOSURE DRAWING

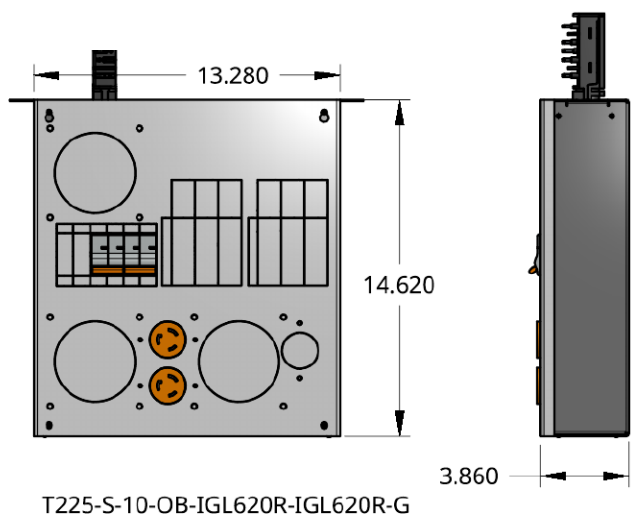

Exact enclosure configuration. Drawing catalog: T225-S-10-OB-IGL620R-IGL620R-G. Printed R-suffixed catalog notation corresponds to the Shopify SKU shown. Not to scale.

SELECTED RECEPTACLE REFERENCE



NEMA L6-20R; 20A; 250V. Selected quantity: 2; Isolated ground. Female interface reference only, not a finished assembly. Source: Hubbell chart, p. V.

# T225 2-pole outlet-box | phase selection update

Order number = listed base SKU + selected phase suffix. The phase is recorded with the order.

## Connection and suffix choices

| Phase assignment | Order suffix | Example full order SKU            |
|------------------|--------------|-----------------------------------|
| L1 + L2          | -L1L2        | T225-S-10-OB-IGL620-IGL620-G-L1L2 |
| L2 + L3          | -L2L3        | T225-S-10-OB-IGL620-IGL620-G-L2L3 |
| L1 + L3          | -L1L3        | T225-S-10-OB-IGL620-IGL620-G-L1L3 |

## Selection guidance

The 208V L6-30R build connects two lines and equipment ground; it does not use neutral. The same outlet interface is selected once for an applicable 208Y/120V or 208V delta busway source. Confirm the system rating and tap compatibility for the actual source. An L14 receptacle has a neutral contact and remains a distinct configuration. L14-30R is a NEMA female interface; standard and isolated-ground devices exist. Choose grounding and physical mounting style for the complete factory tap-off. A NEMA R designation names the female interface, including a cord connector body. The OB or DCXX portion of the T225 base SKU identifies box or drop-cord style.

This page supplements the family guide. Device and complete-assembly ratings remain subject to the selected build and its marked unit; confirm feeder and phase loading.