




USA TrackBusway™ 												USA 
High Output ARCHITECTURAL CYLINDER	Voltage	Type	CRI	Delivered Lumens	Watts	lm/w	Kelvin	Beam Angle	(F) Finish	(O) Options	Catalog Number	
	120V	LED	90+	1200	14	86	3,000 K	24°	B=Black	SP=Spread Lens	BRIS-10L-30K-24-B-(O)	

Description:

- Prewired with track busway adapter
- Forged aluminum heatsink housing provides light weight, durability, clean lines and optimal thermal dissipation.
- Pivot mount allow rotations up to 350° horizontally and 0-90° vertically for maximum aiming adjustability.
- Spring latch secures light fixture

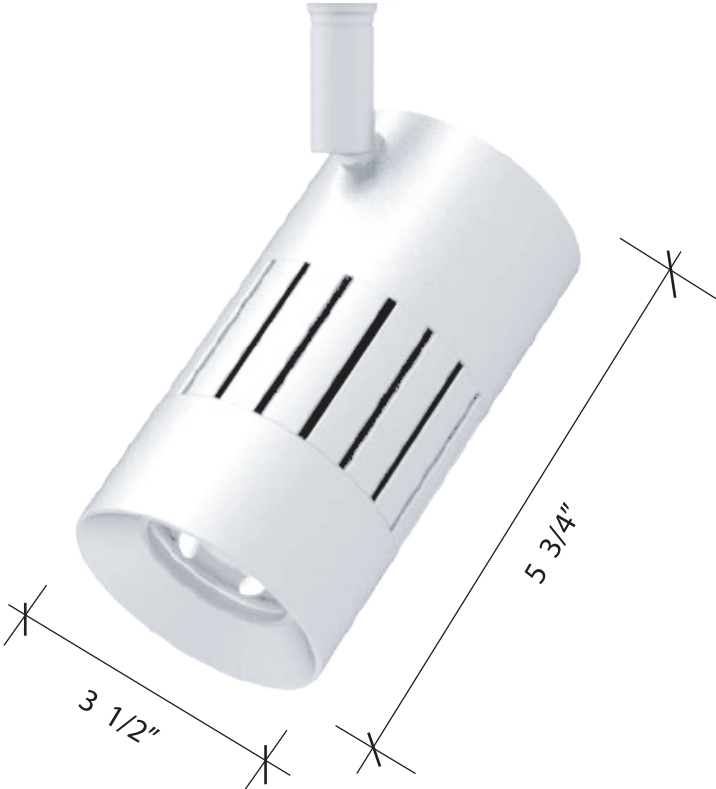

805 Hillsdowne Road
Westerville, Ohio 43081

USA TrackBusway™ is not responsible for changes in graphic materials.
We reserve the right to change details of design, materials, and finish.