


T225 1-Pole Breakered Outlet Box

Standard S-10 | Two-receptacle illustrated configuration

Plug-in outlet-box configuration for the T225 225A busway system. The drawing below shows the larger S-10 enclosure with two L5-20R receptacles.

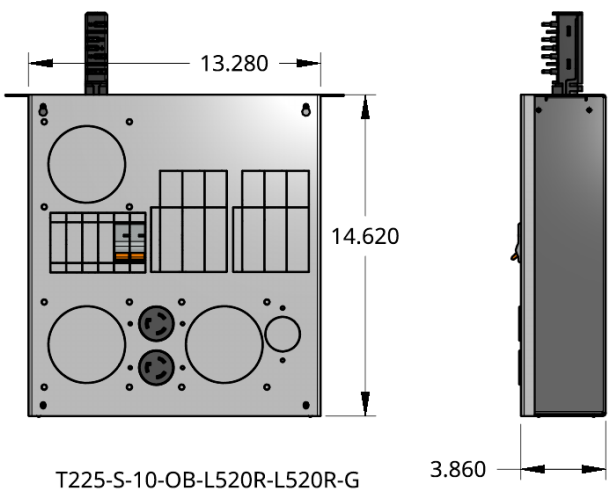

Front and side views. Dimensions are inches and describe the enclosure body; the projecting busway interface and mounting features are outside that body envelope.

Illustrated catalog	T225-S-10-OB-L520R-L520R-G
Receptacles / breakers	Two L5-20R receptacles; two 1-pole breakers
Receptacle device rating	Each L5-20R: 20A, 125V; 2-pole, 3-wire, grounding
Enclosure body (W x H x D)	13.280 x 14.620 x 3.860 inches

Configuration scope

This is a larger S-10 illustrated build. Two 1-pole receptacles can also fit a compact C-10 enclosure; this drawing does not represent that compact build. Receptacle voltage is a device rating, not the selected supply.

Project selection and coordination

Confirm the ordered configuration and marked-unit ratings before installation. Follow the current installation, operation and maintenance manual.

[Product information](#)

[Request a STEP Model](#)

[Installation, operation and maintenance manual](#)