


T225 2-Pole Breakered Outlet Box

Standard S-10 | Two-receptacle illustrated configuration

Plug-in outlet-box configuration for the 225A Track Busway system. The drawing shows the standard S-10 enclosure with two L6-20R receptacles.

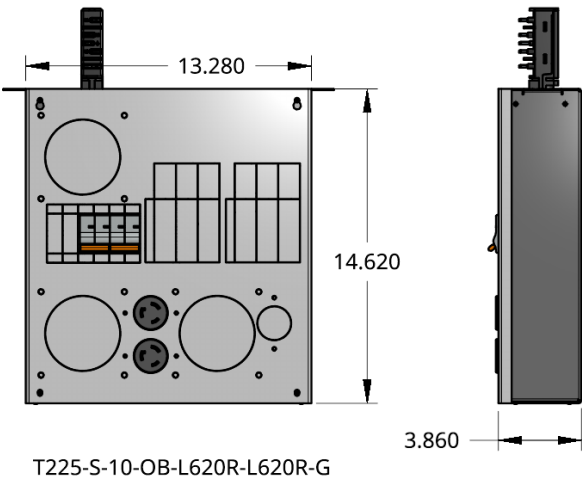

Front and side views. Body dimensions are inches and exclude the projecting busway interface and mounting features.

Illustrated catalog	T225-S-10-OB-L620R-L620R-G
Receptacles / breakers	Two L6-20R receptacles; two 2-pole breakers
Receptacle device rating	Each L6-20R: 20A, 250V; 2-pole, 3-wire, grounding
Selected catalog supply	208V single-phase (2PG); 20A; standard ground; no CPM
Enclosure body (W x H x D)	13.280 x 14.620 x 3.860 inches

Configuration scope

The corresponding selected product SKU is T225-S-10-OB-L620-L620-G. The receptacle voltage is its device rating; the selected supply is listed separately. This sheet covers the illustrated build.

Project selection and coordination

Confirm the ordered configuration and marked-unit ratings before installation. Follow the current installation, operation and maintenance manual.

[Product information](#)

[Request a STEP Model](#)

[Installation, operation and maintenance manual](#)