
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

20A T40 PowerDrop

Built in the United States

120/208V | One L21-20C inline connector

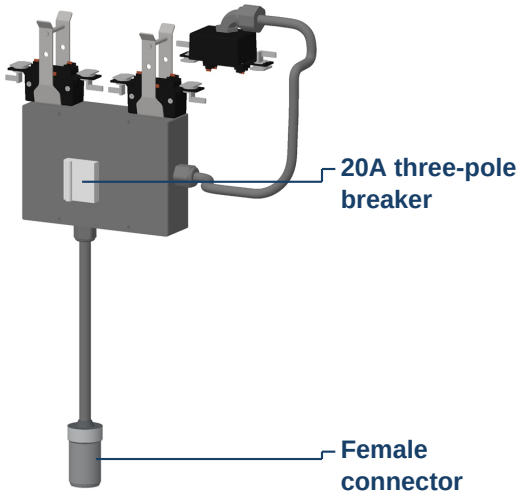

Supply	120/208V AC; three phase
Protection	One 20A three-pole breaker
Output	One L21-20C inline connector
Conductors	A, B, C, neutral and equipment ground
Construction	One equipment cord



1 x L21-20C

Inline female connector

Contact detail; not to scale


Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.

Catalogue numbers / available finishes

Finish	Assembly (C whip included)
Galvanized	MD40-4-208-CB20-DC-XX-L2120C-G
Black	MD40-4-208-CB20-DC-XX-L2120C-B
White	MD40-4-208-CB20-DC-XX-L2120C-W

G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB20 = breaker amperage. Existing output codes retained.

THREE-PHASE - lower A+B and upper C

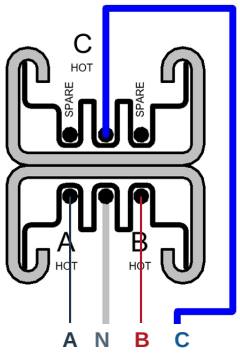

C **Upper deck**

A + B **Lower deck**

A+B at the standard fitting; C through the included phase-access whip.

One 20A three-pole breaker. A, B, C, neutral and equipment ground.

Double-deck profile: twice the single-deck height.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**