
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

15A T40 outlet box

Built in the United States

120V | One L5-15R mounted receptacle

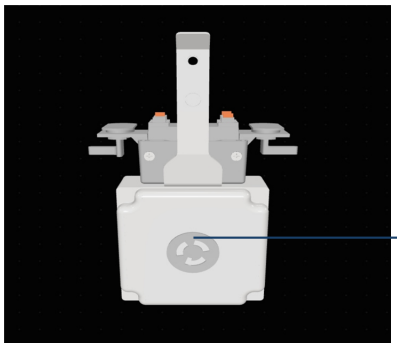

Supply	120V AC; line-to-neutral, single phase
Protection	No integral breaker; upstream protection required
Output	One L5-15R mounted receptacle
Conductors	Line, neutral and equipment ground
Construction	Face-mounted output; no hanging cord



Contact detail; not to scale

1 x L5-15R

Mounted receptacle

Assembly shown in one finish. Available finish-specific catalogue numbers are listed below.


Catalogue numbers / available finishes

Finish	Standard
Galvanized	MD20-2-120-JF15-OB-ST-G
Black	MD20-2-120-JF15-OB-ST-B
White	MD20-2-120-JF15-OB-ST-W


G = galvanized; B = black; W = white. OB = outlet box. Existing output codes retained.

STANDARD - lower-deck A or B

Same fitter and catalogue number; flip to tap either A or B.




A + neutral




B + neutral

PHASE ACCESS

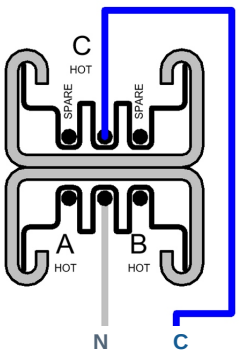

Upper-deck C



Phase-access whip
Separate -WP arrangement; not listed above.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**