
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

15A T40 PowerDrop

Built in the United States

120V | Two L5-15C inline connectors; two cords

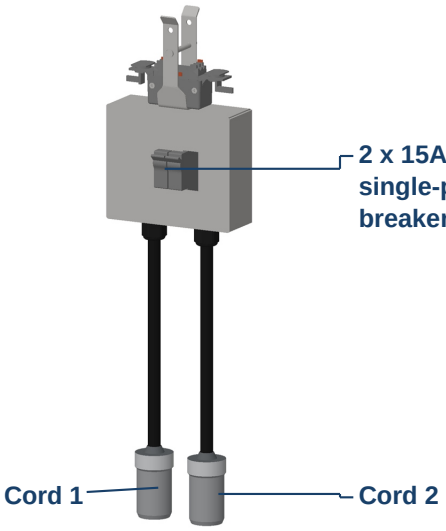

Supply	120V AC; two independent 120V circuits
Protection	Two separate 15A single-pole breakers
Output	Two L5-15C inline connectors; two cords
Conductors	Each cord: line, neutral and equipment ground
Construction	Two separate equipment cords



2 x L5-15C

One inline female connector per cord

Contact detail; not to scale


Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.


Catalogue numbers / available finishes

Finish	Standard	Separately ordered -WP
Galvanized	MD40-2-120-CB15-DC-XX-G-DT	MD40-2-120-CB15-DC-XX-G-DT-WP
Black	MD40-2-120-CB15-DC-XX-B-DT	MD40-2-120-CB15-DC-XX-B-DT-WP
White	MD40-2-120-CB15-DC-XX-DT-W	MD40-2-120-CB15-DC-XX-DT-W-WP

G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB15 = breaker amperage. Existing output codes retained.

TWO SEPARATE CORDS / TWO INDEPENDENT CIRCUITS





A: cord 1 **B: cord 2**

Standard: A+B without a whip. Each cord has its own single-pole breaker and inline female connector.

-WP: one cord on C through the whip; the other selects lower-deck A or B. Same assembly supports A+C or B+C.

Circuit-to-connector wiring: linked companion PDF.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**