# USA TrackBusway™

**ETL Listed to UL 857**
**Busway Standards**
by Intertek


# 20A T40 cord reel

**Built in the United States**

120V | One GFCI duplex 5-20R receptacle




| | |
|---|---|
| **Supply** | 120V AC; line-to-neutral, single phase |
| **Protection** | One 20A single-pole breaker |
| **Output** | One GFCI duplex 5-20R receptacle |
| **Conductors** | Line, neutral and equipment ground |
| **GFCI** | At receptacle assembly; standard breaker |



**2 x 5-20R**

One duplex receptacle

**GFCI at receptacles**

45 ft output cord. Support rod must exceed 1/4 in. nominal diameter; 1/4-20 rod is not permitted.


## Catalogue numbers / available finishes

| Finish | Standard |
|---|---|
| **Galvanized** | MD40-2-120-CB20-CR-45-520D-G-GFCI |

CR-45 = 45 ft reel; 520C / 520D / 520Q = connector / duplex / quad; -GFCI = receptacle protection.


### STANDARD - lower-deck A or B

**Same fitter and catalogue number; flip to tap either A or B.**

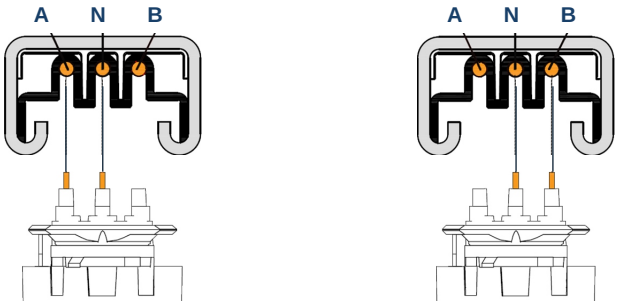



**A + neutral** | **B + neutral**

### PHASE ACCESS

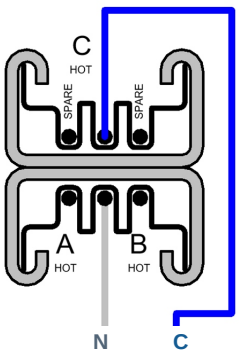


**Upper-deck C**



**Phase-access whip**
Separate -WP arrangement; not listed above.

**Product and configuration choices** | **Wiring & connection details (PDF)** | **T40 listing information**