USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek


20A T40 cord reel

Built in the United States

120V | One duplex 5-20R receptacle (2 outlets)



Supply	120V AC; line-to-neutral, single phase
Protection	One 20A single-pole breaker
Output	One duplex 5-20R receptacle (2 outlets)
Conductors	Line, neutral and equipment ground
Construction	45 ft retractable output cord



2 x 5-20R

One duplex receptacle

Contact detail; not to scale

45 ft output cord. Support rod must exceed 1/4 in. nominal diameter; 1/4-20 rod is not permitted.


Catalogue numbers / available finishes

Finish	Standard
Galvanized	MD40-2-120-CB20-CR-45-520D-G

CR-45 = 45 ft reel; 520C / 520D / 520Q = connector / duplex / quad; -GFCI = receptacle protection.


STANDARD - lower-deck A or B

Same fitter and catalogue number; flip to tap either A or B.

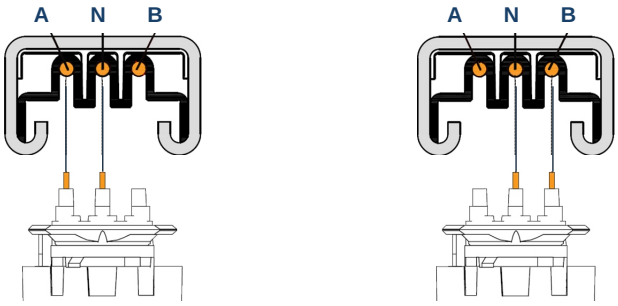


A + neutral **B + neutral**

PHASE ACCESS

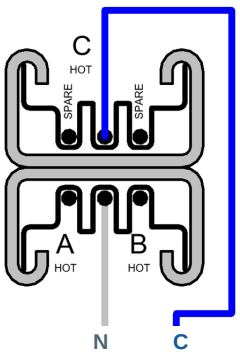

Upper-deck C



Phase-access whip
Separate -WP arrangement; not listed above.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**