USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek


20A T40 cord reel

Built in the United States

120V | Two GFCI duplexes (4 x 5-20R outlets)



Supply	120V AC; line-to-neutral, single phase
Protection	One shared 20A single-pole breaker
Output	Two GFCI duplexes (4 x 5-20R outlets)
Conductors	Line, neutral and equipment ground
GFCI	At receptacle assembly; standard breaker



4 x 5-20R

Two duplex receptacles

GFCI at receptacles

45 ft output cord. Support rod must exceed 1/4 in. nominal diameter; 1/4-20 rod is not permitted.


Catalogue numbers / available finishes

Finish	Standard
Galvanized	MD40-2-120-CB20-CR-45-520Q-G-GFCI


CR-45 = 45 ft reel; 520C / 520D / 520Q = connector / duplex / quad; -GFCI = receptacle protection.

STANDARD - lower-deck A or B

Same fitter and catalogue number; flip to tap either A or B.




A + neutral




B + neutral

PHASE ACCESS

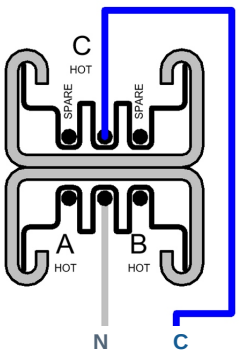

Upper-deck C



Phase-access whip
Separate -WP arrangement; not listed above.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**