USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

20A T40 PowerDrop


Built in the United States

120V | One 5-20C inline connector



Single-cord enclosure: 6.50 in. wide × 5.50 in. high.
Cord shown shortened. Specify length per cord.

Supply	120V AC; line-to-neutral, single phase
Protection	One 20A single-pole breaker
Output	One 5-20C inline connector
Conductors	Line, neutral and equipment ground
Construction	One equipment cord



1 x 5-20C

Inline female connector

Contact detail; not to scale

Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.


Catalogue numbers / available finishes

Finish	Standard	Factory-wired -WP
Galvanized	MD40-2-120-CB20-DC-XX-SB-G	MD40-2-120-CB20-DC-XX-SB-G-WP
Black	MD40-2-120-CB20-DC-XX-SB-B	MD40-2-120-CB20-DC-XX-SB-B-WP
White	MD40-2-120-CB20-DC-XX-W-SB	MD40-2-120-CB20-DC-XX-W-SB-WP


G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB20 = breaker amperage. Existing output codes retained.

STANDARD - lower-deck A or B

Same fitter and catalogue number; flip to tap either A or B.




A + neutral




B + neutral

FACTORY -WP

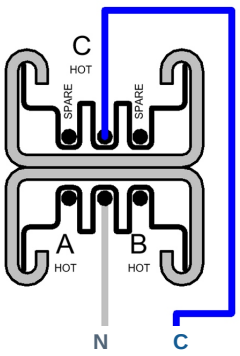

Upper-deck C



Factory-installed whip
Ships wired for C.

Product and configuration choices | **Wiring & connection details (PDF)** | **T40 listing information**