
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

20A T40 PowerDrop

Built in the United States

120V | One L5-20C inline connector

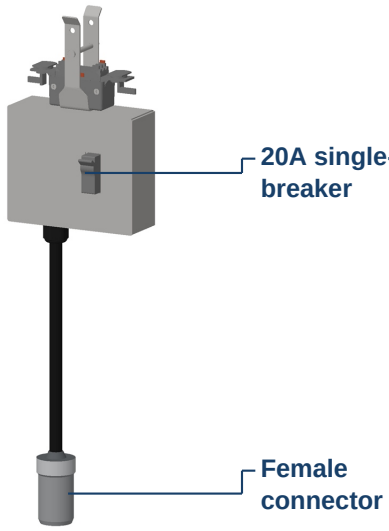

Supply	120V AC; line-to-neutral, single phase
Protection	One 20A single-pole breaker
Output	One L5-20C inline connector
Conductors	Line, neutral and equipment ground
Construction	One equipment cord



1 x L5-20C
Inline female connector

Contact detail; not to scale

Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.


Catalogue numbers / available finishes

Finish	Standard	Separately ordered -WP
Galvanized	MD40-2-120-CB20-DC-XX-G-ST	MD40-2-120-CB20-DC-XX-G-ST-WP
Black	MD40-2-120-CB20-DC-XX-B-ST	MD40-2-120-CB20-DC-XX-B-ST-WP
White	MD40-2-120-CB20-DC-XX-W-ST	MD40-2-120-CB20-DC-XX-W-ST-WP


G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB20 = breaker amperage. Existing output codes retained.

STANDARD - lower-deck A or B

Same fitter and catalogue number; flip to tap either A or B.




A + neutral




B + neutral

OPTIONAL -WP

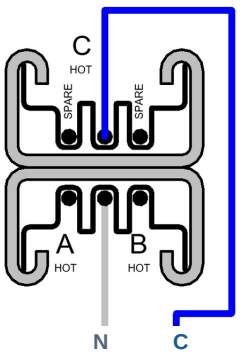

Upper-deck C



Phase-access whip
Order -WP separately.

Product and configuration choices | **Wiring & connection details (PDF)** | **T40 listing information**