
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

30A T40 breakered outlet box

Built in the United States

120V | One L5-30R mounted receptacle

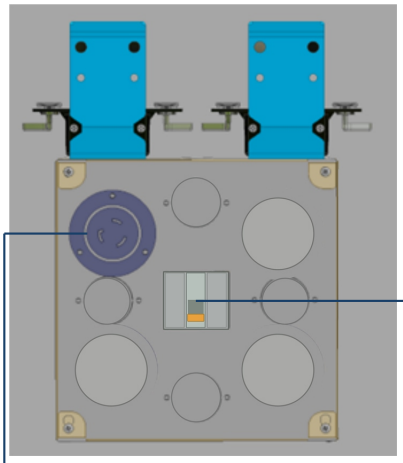

30A single-pole breaker



1 x L5-30R
Mounted receptacle

Contact detail; not to scale

Supply	120V AC; line-to-neutral, single phase
Protection	One 30A single-pole breaker
Output	One L5-30R mounted receptacle
Conductors	Line, neutral and equipment ground
Construction	Face-mounted output; no hanging cord

Assembly shown in one finish. Available finish-specific catalogue numbers are listed below.


Catalogue numbers / available finishes

Finish	Standard	Separately ordered -WP
Galvanized	MD40-2-120-CB30-OB-ST-G	MD40-2-120-CB30-OB-ST-G-WP
Black	MD40-2-120-CB30-OB-ST-B	MD40-2-120-CB30-OB-ST-B-WP
White	MD40-2-120-CB30-OB-ST-W	MD40-2-120-CB30-OB-ST-W-WP


G = galvanized; B = black; W = white. OB = outlet box. CB30 = breaker amperage. Existing output codes retained.

STANDARD - lower-deck A or B

Same fitter and catalogue number; flip to tap either A or B.




A + neutral




B + neutral

OPTIONAL -WP

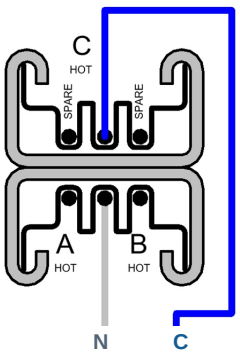

Upper-deck C



Phase-access whip
Order -WP separately.

Product and configuration choices | **Wiring & connection details (PDF)** | **T40 listing information**