
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

20A T40 PowerDrop

Built in the United States

208V | One L6-20C inline connector

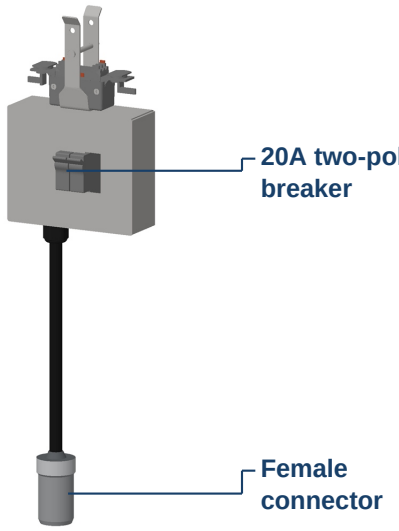

Supply	208V AC; line-to-line, single phase
Protection	One 20A two-pole breaker
Output	One L6-20C inline connector
Conductors	Two lines and equipment ground; no neutral
Construction	One equipment cord



1 x L6-20C

Inline female connector

Contact detail; not to scale


Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.

Catalogue numbers / available finishes

Finish	Standard	Separately ordered -WP
Galvanized	MD40-3-208-CB20-DC-XX-ST-G	MD40-3-208-CB20-DC-XX-ST-G-WP
Black	MD40-3-208-CB20-DC-XX-ST-B	MD40-3-208-CB20-DC-XX-ST-B-WP
White	MD40-3-208-CB20-DC-XX-ST-W	MD40-3-208-CB20-DC-XX-ST-W-WP

G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB20 = breaker amperage. Existing output codes retained.

LINE-TO-LINE - 208V



Lower-deck A+B

Two lines and equipment ground; no neutral at this output.

One 20A two-pole breaker.

Optional -WP: B+C with upper-deck C accessed through the whip.

Original section drawing: Roman. Detailed wiring is linked below.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**