
# USA TrackBusway™

**ETL Listed to UL 857**
**Busway Standards**
by Intertek


# 30A T40 PowerDrop

**Built in the United States**

208V | One L6-30C inline connector

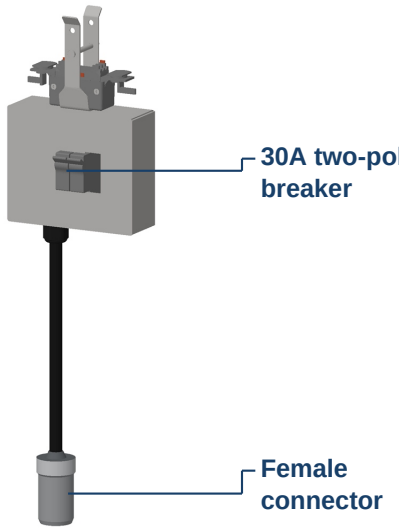


| | |
|---|---|
| **Supply** | 208V AC; line-to-line, single phase |
| **Protection** | One 30A two-pole breaker |
| **Output** | One L6-30C inline connector |
| **Conductors** | Two lines and equipment ground; no neutral |
| **Construction** | One equipment cord |




**1 x L6-30C**
Inline female connector

Contact detail; not to scale


Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.

## Catalogue numbers / available finishes

| Finish | Standard | Separately ordered -WP |
|---|---|---|
| **Galvanized** | MD40-3-208-CB30-DC-XX-ST-G | MD40-3-208-CB30-DC-XX-ST-G-WP |
| **Black** | MD40-3-208-CB30-DC-XX-ST-B | MD40-3-208-CB30-DC-XX-ST-B-WP |
| **White** | MD40-3-208-CB30-DC-XX-ST-W | MD40-3-208-CB30-DC-XX-ST-W-WP |

G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB30 = breaker amperage. Existing output codes retained.

### LINE-TO-LINE - 208V




**Lower-deck A+B**

Two lines and equipment ground; no neutral at this output.

One 30A two-pole breaker.

Optional -WP: B+C with upper-deck C accessed through the whip.

Original section drawing: Roman. Detailed wiring is linked below.

**Product and configuration choices** **Wiring & connection details (PDF)** **T40 listing information**