
USA TrackBusway™

ETL Listed to UL 857
Busway Standards
by Intertek

20A T40 PowerDrop


Built in the United States

240V | One 6-20C inline connector

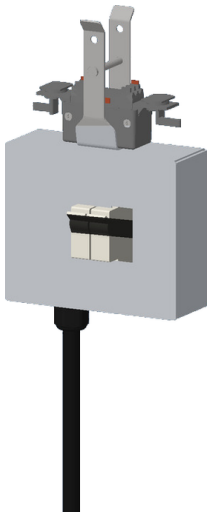

Tap-off enclosure and breaker
Cord shown shortened. Specify length per cord.

Supply	240V AC; line-to-line, single phase
Protection	One 20A two-pole breaker
Output	One 6-20C inline connector
Conductors	Two lines and equipment ground; no neutral
Construction	One equipment cord



1 x 6-20C

Inline female connector

Contact detail; not to scale


Specify output-cord length when ordering. Available finishes and catalogue numbers are listed below.

Catalogue numbers / available finishes

Finish	Standard
Galvanized	MD40-3-240-CB20-DC-XX-SB-G
Black	MD40-3-240-CB20-DC-XX-SB-B
White	MD40-3-240-CB20-DC-XX-SB-W

G = galvanized; B = black; W = white. DC-XX = cord; specify length. CB20 = breaker amperage. Existing output codes retained.

LINE-TO-LINE - 240V



Lower-deck A+B

Two lines and equipment ground; no neutral at this output.

One 20A two-pole breaker.

Standard A+B phase pair. Match the assembly to the stated supply voltage.

Original section drawing: Roman. Detailed wiring is linked below.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**