
USA TrackBusway™

ETL Listed to UL 857 Busway Standards
by Intertek

20A T40 breakered outlet box


Built in the United States

480V | One L16-20R mounted receptacle

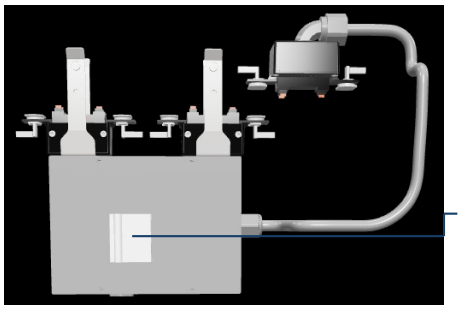

Supply	480V AC; three phase
Protection	One 20A three-pole breaker
Output	One L16-20R mounted receptacle
Conductors	A, B, C, equipment ground; no neutral
Construction	Face-mounted output; no hanging cord

Receptacle on opposite face; detail below.



1 x L16-20R
Mounted receptacle

Contact detail; not to scale


Assembly shown in one finish. Available finish-specific catalogue numbers are listed below.

Catalogue numbers / available finishes

Finish	Assembly (C whip included)
Galvanized	MD40-4-480-CB20-OB-ST-G

G = galvanized; B = black; W = white. OB = outlet box. CB20 = breaker amperage. Existing output codes retained.

THREE-PHASE - lower A+B and upper C

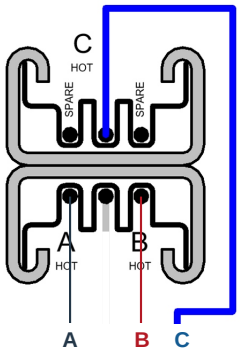

C **Upper deck**

A + B **Lower deck**

A+B at the standard fitting; C through the included phase-access whip.

One 20A three-pole breaker. A, B, C, equipment ground; no neutral.

Double-deck profile: twice the single-deck height.

Product and configuration choices **Wiring & connection details (PDF)** **T40 listing information**