
T40 wiring & connection details

reel 120 | Match the rating on the individual cut sheet

Standard lower-deck connection




Neutral continues separately to output N; equipment ground follows the bonded fitting and housing path.

45 ft reel assemblies use one 20A branch shared by all receptacles. GFCI options provide protection at the receptacle assembly.

STANDARD - lower-deck A or B

Flip the same fitting; same catalogue number.

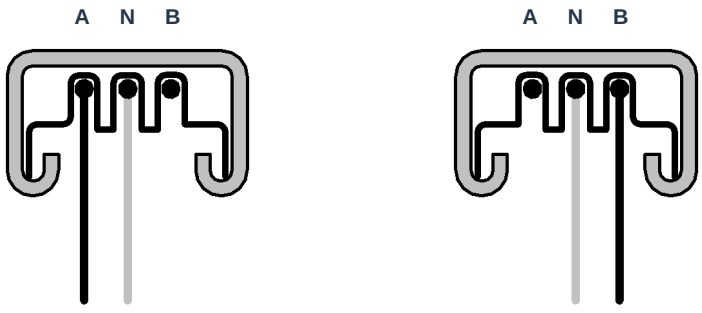

A + neutral connection

B + neutral connection

No A-specific or B-specific fitting to order.

STANDARD CONFIGURATION

This sheet covers the standard lower-deck arrangement offered for this product.

Upper-deck C requires a separate phase-access arrangement; it is not included in these catalogue selections.

Support rod must exceed 1/4 in. nominal diameter. 1/4-20 rod is not permitted.