

225A Track Busway

2-Pole Breakered Outlet Box


Shopify SKU: T225-S-10-OB-IGL630-IGL630-IGL630-G

Shopify variant ID: 42741716222039
USA TrackBusway catalog / part no.: T225-S-10-OB-IGL630R-IGL630R-IGL630R-G

SELECTED CONFIGURATION - PRODUCT DATA

Ordered supply	208V line-to-line (2PG); no neutral
Breaker protection	3 x 2-pole breakers; Selected branch current: 30A
Outputs	3 receptacles; L6-30R
NEMA device rating	30A, 250V; 2 device poles, 3 wires including ground
Device contact roles	Two lines + equipment ground; no neutral
Grounding	Isolated ground
CPM	None (No CPM)
Enclosure	Standard S-10
Body dimensions	13.280 W x 14.620 H x 3.860 D in. Body only; excludes projections.

ENCLOSURE DRAWING

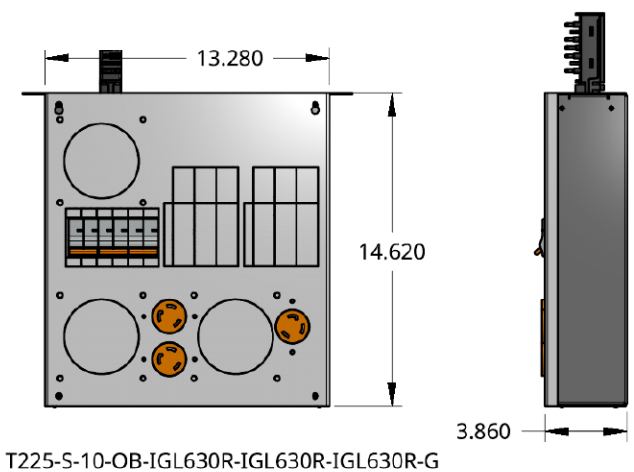

T225-S-10-OB-IGL630R-IGL630R-IGL630R-G

Exact enclosure configuration. Drawing catalog: T225-S-10-OB-IGL630R-IGL630R-IGL630R-G. Printed R-suffixed catalog notation corresponds to the Shopify SKU shown. Not to scale.

SELECTED RECEPTACLE REFERENCE



NEMA L6-30R; 30A; 250V. Selected quantity: 3; Isolated ground. Female interface reference only, not a finished assembly. Source: Hubbell chart, p. V.

T225 2-pole outlet-box | phase selection update

Order number = listed base SKU + selected phase suffix. The phase is recorded with the order.

Connection and suffix choices

Phase assignment	Order suffix	Example full order SKU
L1 + L2	-L1L2	T225-S-10-OB-IGL630-IGL630-IGL630-G-L1L2
L2 + L3	-L2L3	T225-S-10-OB-IGL630-IGL630-IGL630-G-L2L3
L1 + L3	-L1L3	T225-S-10-OB-IGL630-IGL630-IGL630-G-L1L3

Selection guidance

The 208V L6-30R build connects two lines and equipment ground; it does not use neutral. The same outlet interface is selected once for an applicable 208Y/120V or 208V delta busway source. Confirm the system rating and tap compatibility for the actual source. An L14 receptacle has a neutral contact and remains a distinct configuration. L14-30R is a NEMA female interface; standard and isolated-ground devices exist. Choose grounding and physical mounting style for the complete factory tap-off. A NEMA R designation names the female interface, including a cord connector body. The OB or DCXX portion of the T225 base SKU identifies box or drop-cord style.

This page supplements the family guide. Device and complete-assembly ratings remain subject to the selected build and its marked unit; confirm feeder and phase loading.